



LV Motors: IE2 Safe Area

Reliable & Long Lasting

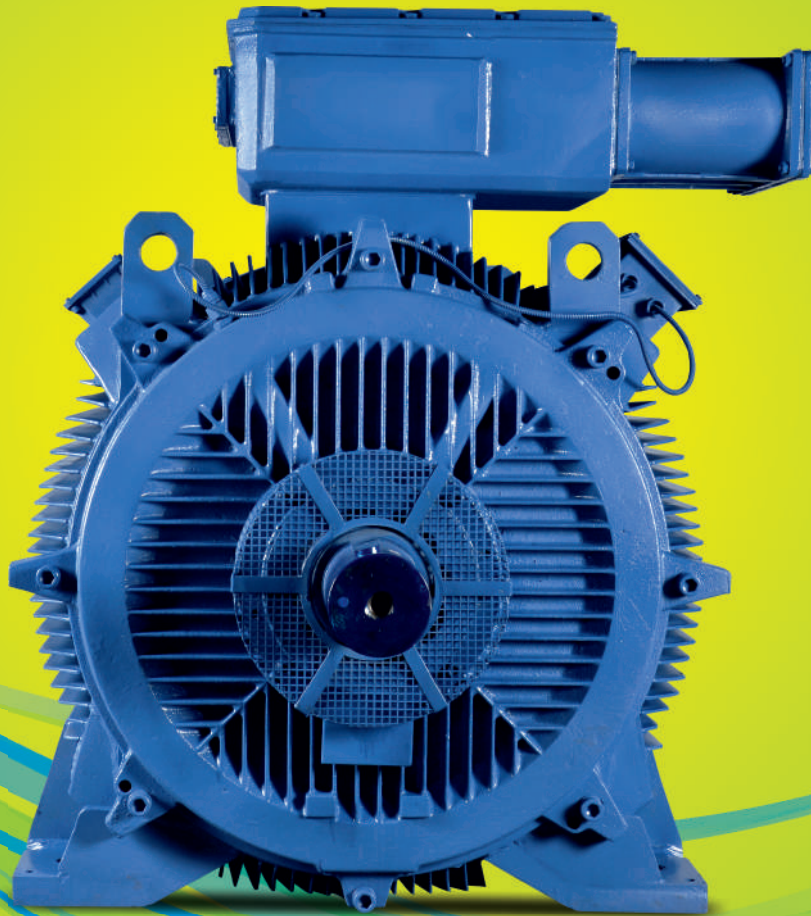

A MOTOR FOR EVERY NEED

BHARAT BIJLEE MOTORS: MILESTONES

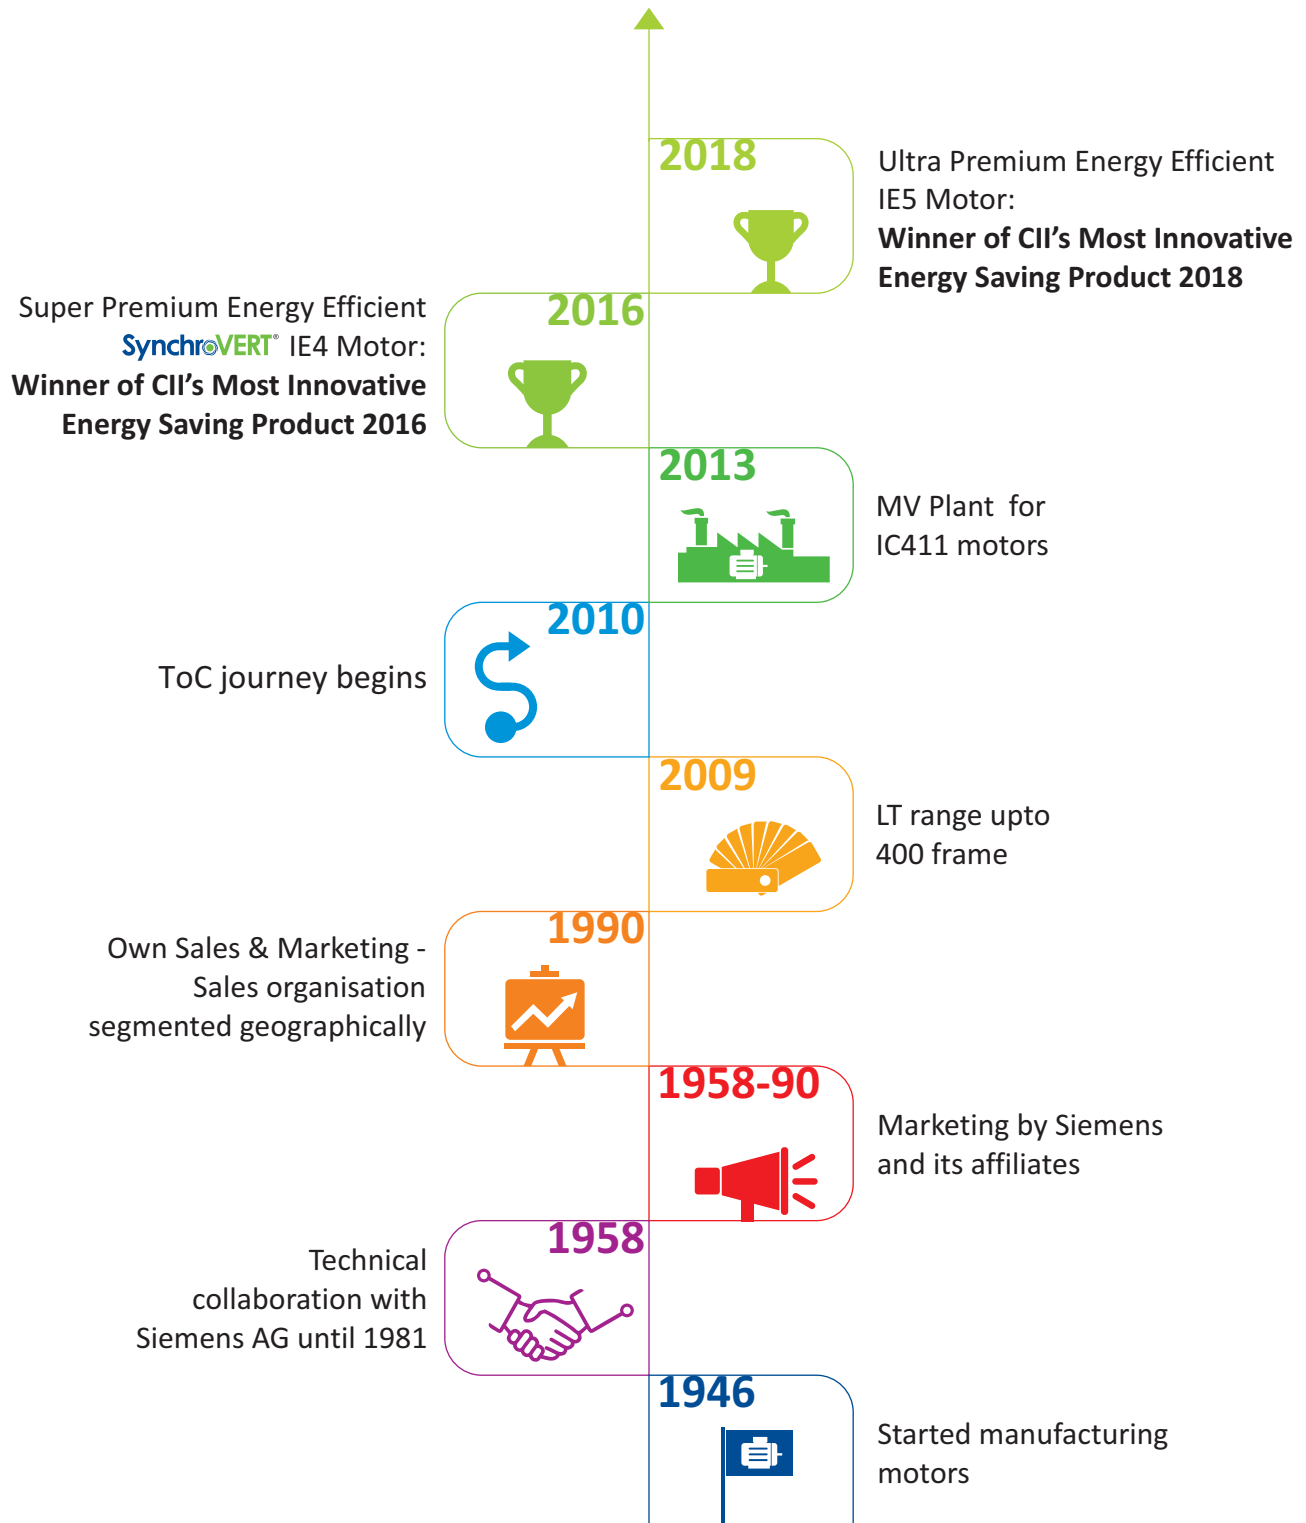

WHY BHARAT BIJLEE?



Preferred brand across multiple sectors like Cement, Construction, Steel, Food & Beverages, Water & Wastewater, Sugar & Distilleries to name a few.



Motors suited for all applications i.e. Pumps, Compressors, Fans & Blowers, Conveyors, Lifts, Screen, Vibrators, Centrifuges, Stone Crusher and many more.



The most suitable solutions for extremely harsh and severe applications.



Customized motors designed and manufactured to suit application-specific needs.



Motors conform to relevant IS/IEC standards.



Annual Production capacity over 3,00,000 motors.




Supply chain based on the concept of 'Theory of Constraints' ensures short lead times, reliable deliveries and superior availability.



Rigorous process control and quality assurance.



Pan India dealer and service network.

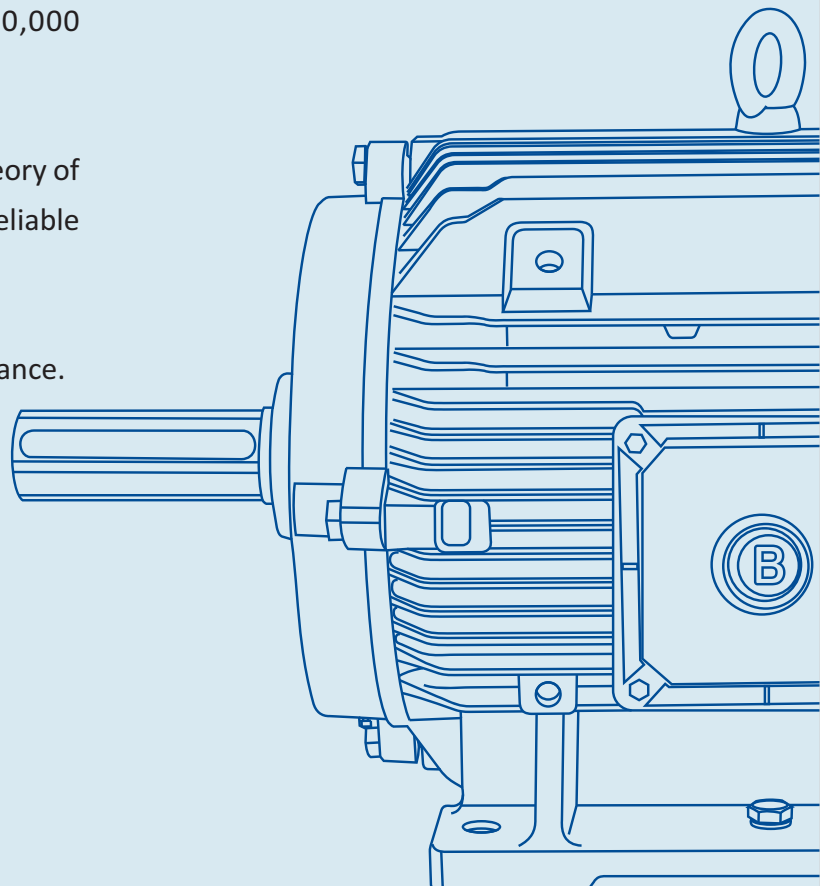

The industrial sector accounts for over half of the total electricity consumption, of which 60-70% is utilized by electric motors. This indicates that electric motors consume more energy than any other application.

A typical electric motor's average lifespan ranges anywhere between 15 to 20 years depending on the quality of raw material and manufacturing process. The operational cost of a motor is around 95% of the total life cycle cost. With a steadily increasing installed base of electric motors, our nation has a tremendous opportunity to save energy.

The purpose of energy efficiency labelling is to overcome the lack of awareness and also help end users in selecting from a range of energy-efficient products. While the developed world has kept pace with energy efficiency measures, developing countries have been slower to implement them for electric motors.

In the past, adhering to the Minimum Energy Performance

Standards (MEPS) was voluntary. However, as per the recent mandate by the Government of India, the minimum efficiency of three phase squirrel cage induction motors that can be manufactured and sold in the country needs to be IE2 efficiency level conforming to the IS standards.

Bharat Bijlee has always advocated the concept of energy saving for a sustainable future. It has always been our persistent endeavour to develop a wide range of motors in the premium efficiency series, thus rendering a choice to customers to select from the wide range of energy efficient motors.


Established in 1946, Bharat Bijlee has evolved over the decades to provide a wide range of motors suitable even for the most severe of applications. Having gained the trust of our customers over the years, we continue to be the most preferred brand as a result of our unique offering to the industry.



A MOTOR FOR EVERY NEED

REFERENCE STANDARDS







IS/IEC 60034-1	Three Phase Induction Motor specifications ("Rotating Electrical Machines - Part 1: Rating & Performance")
IS : 900	Code of practice for installation & maintenance of Induction Motors
IS: 1231	Dimensions of foot mounted A.C Induction Motors
IS: 2223	Dimensions of flange mounted A.C Induction Motors
IS: 4029	Guide for testing of Three Phase Induction Motors (For Standard TEFC SCR Motors)
IS: 4889	Methods of determination of efficiency of Rotating Electrical Machines (For Standard TEFC SCR Motors)
IS/IEC 60034-5	Degree of protection provided by the integral design of Rotating Electrical Machines (IP Code Classification)
IS: 6362/IEC 60034-6	Designation of method of cooling for Rotating Electrical Machines / Method of cooling (IC Code)
IS:12065/IEC 60034-9	Permissible limits of noise level for Rotating Electrical Machines
IS : 12075	Mechanical Vibration of Rotating Electrical Machines
IS : 12615	Energy Efficient Induction Motors Three Phase Squirrel Cage
IEC 60034-10	Rotating Electrical Machines - Efficiency classes of line operated AC Motors (IE Code)
IEC 60072-1	Dimension & Output rating of Rotating Electrical Machines
IS:15999 (Part 2/Sec 1)	Standard Methods for determining losses and efficiency from tests (For IE Series Motors)

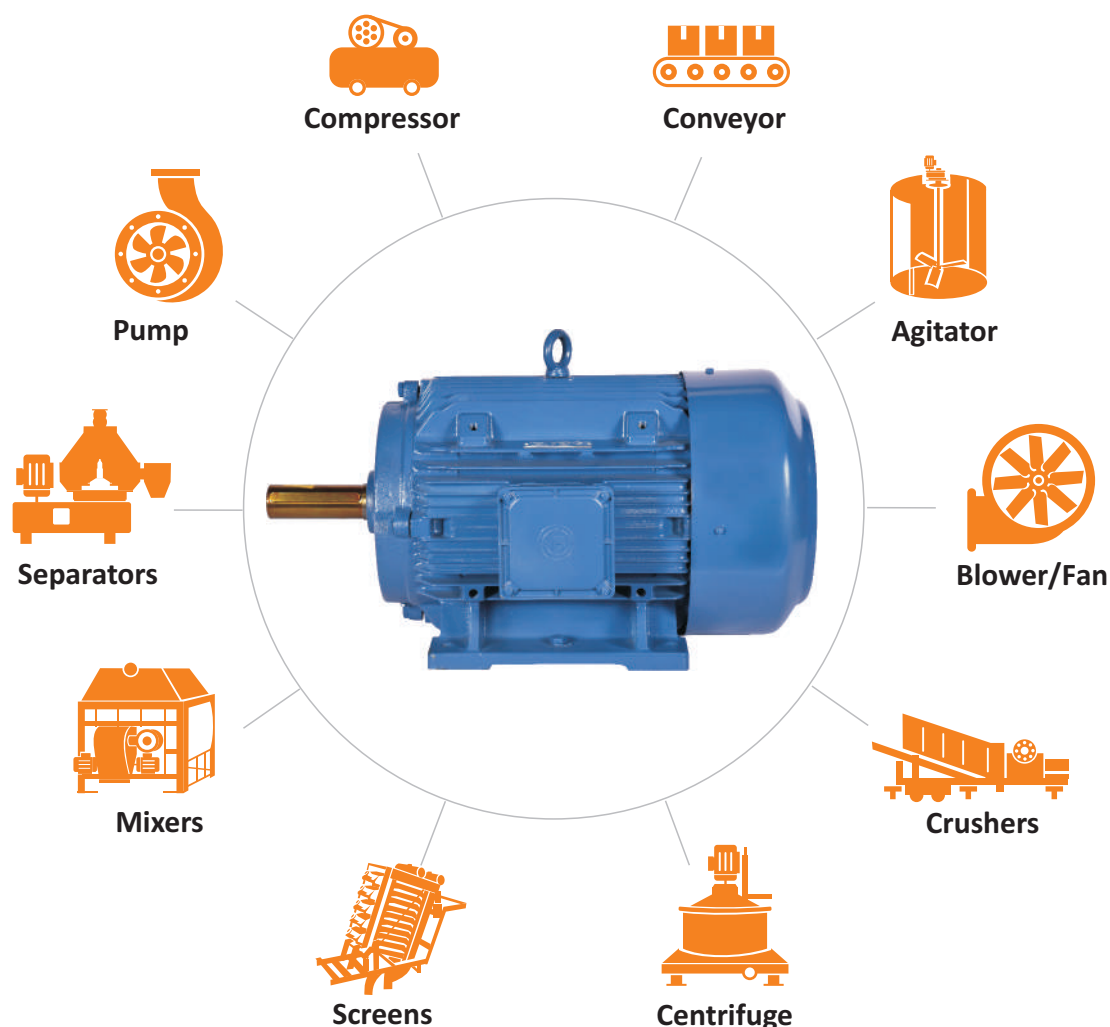




MOUNTING ARRANGEMENT

Base refers to baseplate, foundation, slide rails, pedestal, etc.

Horizontal Mounting

Symbol	Schematic Diagram	Frame	Mounting
B3		With feet	Mounted on base
B5		Without feet	Mounted on Type B flange with shaft extension at flange end
B35		With feet	Mounted on base with feet, and on Type B flange with shaft extension at flange end
B6		With feet	Mounted on base to the wall; feet towards the left when viewed from DE side
B7		With feet	Mounted on base to the wall; feet towards the right when viewed from DE side
B8		With feet	Mounted on base to the ceiling; feet at the top
B14		Without feet	Mounted on Type C flange with shaft extension at flange end


Vertical Mounting

Symbol	Schematic Diagram	Frame	Mounting
V5		With feet	Mounted on base to the wall; shaft downwards
V6		With feet	Mounted on base to the wall; shaft upwards
V1		Without feet	Mounted on Type B flange with shaft extension at flange end; shaft downwards
V3		Without feet	Mounted on Type B flange with shaft extension at flange end; shaft upwards
V18		Without feet	Mounted on Type C flange with shaft extension at flange end; shaft downwards
V19		Without feet	Mounted on Type C flange with shaft extension at flange end; shaft upwards

GENERAL TECHNICAL SPECIFICATIONS

Range

- **Series:** 3 Phase Squirrel Cage Induction, IE2 Safe Area Motors
- **kW Rating:** 0.12 to 355
- **Frame:** 63 to 355
- **Polarity:** 2, 4, 6 & 8

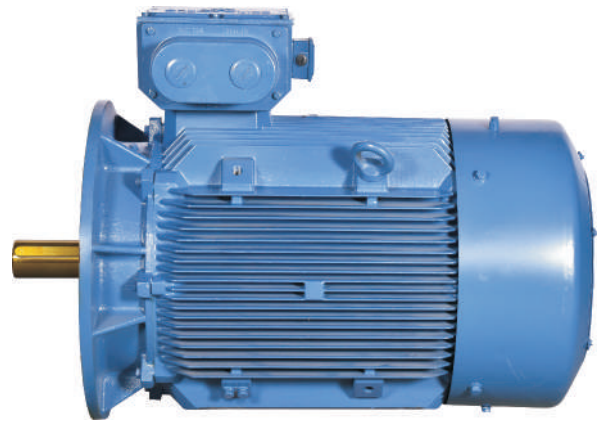

Standard Feature	Optional Feature
Voltage: 415V	Any other voltage on request
Frequency: 50 Hz	60 Hz
IP55	IP56, IP65, IP66
B3 Mounting	B5, B35, B14 (upto 132 Frame)
Ambient: 50°C ; For DCCA motors: 40°C	Any other on request
Altitude: up to 1000 m above mean sea level	Motors for higher altitudes on request
Top TB: All frames except 200 frame / 4 Pole RHS TB: 200 frame / 4 Pole	Any other on request
Aluminium Construction: 63 to 132 Frame Cast Iron Construction: 160 Frame & Above	Cast Iron construction: 90 to 132 Frame
Insulation: Class F	Insulation: Class H
IC411: Totally Enclosed Fan Cooled	IC410: Natural Ventilation IC416: Forced Cooling for 132 Frame & above
Sealed Bearing: upto 200 Frame Online Greasing Arrangement: 225 Frame & Above	Online Greasing Arrangement: 160 to 200 Frame
Paint Shade: Acrylic base, RAL5000	Any other shade or material on request
Fan Cover: Steel	
Thermal Protection in DCCA Motors: 3 nos. simplex RTD	Duplex RTD: For DCCA Motors Simplex & duplex RTD: 250 Frame & Above BTD: 250 Frame & above Thermister: 80 Frame & Above
Space Heater for DCCA Motors	Space Heater: 90 Frame & Above
Inverter Duty Application: 315 Frame & Above	Inverter Duty Application: Upto 280 Frame
Packing: Thermocol / Corrugated Boxes: Upto 132 Frame Packing: Wooden Packing Boxes: 160 Frame & Above	Wooden Pallets Sea Worthy / Export Packing Case
For standard bearings, kindly refer to the bearing chart	Insulated Bearing / Hybrid Bearing: 132 frame & above Cylindrical Roller Bearing with Locking Arrangement on DE Side : 160 frame & above

Our other optional features:

- Higher polarity
- Motors suitable for inverter duty application for all voltages
- Motors suitable for S2 to S9 duty operation
- VPI upto 280 frame
- Non standard shaft material, diameter & extension
- Front bearing locking arrangement
- SS Hardware, Canopy, non standard paint & paint shade, cable gland
- Provision for hollow shaft encoder mounting
- High temperature grease
- Reduced & Special grades of vibration as per IS 12075 can be provided on request

RE-RATING FACTORS APPLICABLE UNDER DIFFERENT CONDITIONS OF SUPPLY VOLTAGE, FREQUENCY, AMBIENT & ALTITUDE

I. Variation in Supply Voltage & Frequency

Voltage Variation %	Frequency Variation %	Combined Voltage & Frequency %	Permissible Output as % of Rated Value
± 10	± 5	± 10	100
± 12.5	± 5	± 12.5	95
± 15	± 5	± 15	90

II. Variation in Ambient

Ambient Temperature (°C)	Permissible Output as % of Rated Value
< 30	107
30 to 45	103
50	100
55	96
60	92

III. Variation in Altitude

Altitude Above Mean Sea Level (m)	Permissible Output as % of Rated Value
1000	100
1500	97
2000	94
2500	90
3000	86
3500	82
4000	77

Method of Starting:

kW Rating	Method of Starting	No. of Leads
Upto & including 1.5kW	DOL	6
Above 1.5kW	DOL or Star / Delta	6

Number of Consecutive Starts:

For continuous (S1) duty motors wherein load $GD^2 \leq \text{Motor } GD^2$, the motors can safely withstand 3 consecutive starts from cold condition & 2 consecutive starts from hot condition.

Starting Current Measurement of Bharat Bijlee Motors:

Induction motor starting current is generally 6 to 7 times the rated current of the motor. Starting current measurement may be carried out at reduced voltage due to capacity constraint and then extrapolated to the rated voltage. At Bharat Bijlee, the starting current measurement is done at reduced voltage as per the table below.

kW Range	Measurement at % of voltage to rated voltage
0.12kW to 90kW	70%
90kW to 200kW	60%
200kW to 355kW	35%
355kW to 560kW	25%
560kW and above (with rated voltage 690V or higher)	25%

Bearing Chart

Frame Size	Bearing Nos.	
	D.E.	N.D.E.
63	6201 2Z	6201 2Z
71	6202 2Z	6202 2Z
80	6004 2Z	6004 2Z
90S & L	6205 2Z	6205 2Z
100L	6206 2Z	6205 2Z
112M	6206 2Z	6205 2Z
132S / M	6208 2Z	6208 2Z
160M/L	6309 2Z	6209 2Z
180M/L	6310 2Z	6210 2Z
200L	6312 2Z	6212 2Z
225S/M	6313	6213
250M	6315	6215
280S/M (2 Pole)	6316	6316
280S/M (4,6,8 Pole)	6317	6316
315S/M & L	6319	6319
355L	6322	6322

LV MOTORS: IE2 SAFE AREA

Performance Data : IE2 Efficiency Series for Safe Area Application

Applicable standard for testing & efficiency determination : IS15999

Voltage: 415V +/- 10%

Frequency: 50Hz +/- 5%

Combined Variation: +/- 10%

Ambient: 50°C

Duty: S1 (Continuous)

3000 rpm (2 Pole)

Insulation: Class F

Temperature Rise: Class B

Protection: IP55

Rated Output		Frame size	Type Reference	Operating characteristics at rated output					With DOL starting				Rotor GD ²	Net Weight B3 constr.
				Rated Speed	Rated Current	Rated Torque	Power Factor			Starting Current to Rated Current Ratio	Starting Torque to Rated Torque Ratio	Pullout Torque to Rated Torque Ratio		
kW	HP		B3 construction	RPM	Amps.	kg-m	FL	3/4L	1/2L	FL	3/4L	1/2L	kgm ²	kg
0.37	0.50	71	2H0712A3AT000	2800	0.95	0.13	0.78	0.70	0.53	69.5	69.5	64.0	0.0012	6.8
0.55	0.75	71	2H071233AT000	2820	1.36	0.19	0.76	0.64	0.50	74.1	74.1	65.0	0.0016	7.7
0.75	1.0	80	2H080213AT000	2840	1.66	0.26	0.81	0.73	0.60	77.4	77.4	76.4	0.0026	10
1.1	1.5	80	2H080233AT000	2855	2.37	0.38	0.81	0.75	0.61	79.6	79.6	79.6	0.0034	11
1.5	2	90S	2H09S243AT000	2835	3.09	0.52	0.83	0.77	0.66	81.3	81.3	80.0	0.0053	15
2.2	3	90L	2H09L273AT000	2835	4.33	0.76	0.85	0.80	0.70	83.2	83.2	82.5	0.0066	17
3.7	5	100L	2H10L233AT000	2890	6.84	1.25	0.88	0.83	0.73	85.5	85.5	83.0	0.0142	24
5.5	7.5	132S	2H13S2G3AT000	2930	9.88	1.83	0.89	0.86	0.79	87.0	87.0	84.5	0.0515	47
7.5	10	132S	2H13S2N3AT000	2935	13.3	2.49	0.89	0.86	0.80	88.1	87.7	86.0	0.0800	59
9.3	12.5	160M	2H16M233CT000	2940	16.5	3.08	0.88	0.86	0.81	88.9	88.6	86.0	0.142	98
11	15.0	160M	2H16M253CT000	2940	19.5	3.64	0.88	0.85	0.79	89.4	89.4	87.0	0.160	104
15	20.0	160M	2H16M263CT000	2940	26.3	4.97	0.88	0.87	0.82	90.3	90.0	88.0	0.191	115
18.5	25.0	160L	2H16L293CT000	2940	31.5	6.13	0.90	0.89	0.86	90.9	90.9	89.0	0.244	137
22	30.0	180M	2H18M233CT000	2940	38.5	7.29	0.87	0.84	0.78	91.3	91.3	90.0	0.325	171
30	40.0	200L	2H20L2A3CT000	2950	51.6	9.91	0.88	0.86	0.80	92.0	92.0	90.5	0.524	259
37	50.0	200L	2H20L273CT000	2955	64.7	12.2	0.86	0.83	0.75	92.5	92.5	91.0	0.573	272
45	60.0	225M	2H22M253CT000	2965	77.5	14.8	0.87	0.85	0.80	92.9	92.9	91.5	1.04	365
55	75.0	250M	2H25M233CT000	2970	92.2	18.0	0.89	0.87	0.81	93.2	92.9	91.0	1.45	487
75	100	280S	2H28S23300000	2970	122	24.6	0.91	0.89	0.86	93.8	93.6	92.0	3.01	669
90	120	280M	2H28M25300000	2970	146	29.5	0.91	0.89	0.86	94.1	93.9	90.9	3.42	750
110	150	315S	2H31S23300000	2982	180	35.9	0.90	0.86	0.80	94.3	94.1	91.5	5.00	940
125	170	315M	2H31M2A300000	2982	207	40.8	0.89	0.85	0.78	94.5	93.5	91.5	5.00	940
132	180	315M	2H31M23300000	2982	216	43.1	0.90	0.86	0.80	94.6	93.6	91.3	5.00	940
150	200	315L	2H31L2A300000	2982	248	49.0	0.89	0.84	0.78	94.7	93.7	92.2	6.20	1100
160	215	315L	2H31L25300000	2985	261	52.2	0.90	0.86	0.80	94.8	94.1	93.0	6.20	1100
180	240	315L	2H31L2B300000	2982	300	58.8	0.88	0.82	0.75	94.9	94.1	93.0	7.70	1390
200	270	355L	2H35L2A300000	2985	325	65.3	0.90	0.87	0.82	95.0	94.2	92.2	12.0	1680
250	335	355L	2H35L21300000	2985	407	81.6	0.90	0.88	0.84	95.0	94.5	92.8	12.0	1680
315	425	355L	2H35L23300000	2985	513	103	0.90	0.88	0.84	95.0	94.5	93.0	14.7	1870

Note: All performance values are subject to tolerances as per IS/IEC 60034-1

LV MOTORS: IE2 SAFE AREA

Performance Data : IE2 Efficiency Series for Safe Area Application

Applicable standard for testing & efficiency determination : IS15999

Voltage: 415V +/- 10%

Frequency: 50Hz +/- 5%

Combined Variation: +/- 10%

Ambient: 50°C

Duty: S1 (Continuous)

1500 rpm (4 Pole)

Insulation: Class F

Temperature Rise: Class B

Protection: IP55

Rated Output		Frame size	Type Reference	Operating characteristics at rated output						With DOL starting				Rotor GD ²	Net Weight B3 constr.		
				Rated Speed	Rated Current	Rated Torque	Power Factor			% Efficiency			Starting Current to Rated			Starting Torque to Rated	Pullout Torque to Rated
kW	HP		B3 construction	RPM	Amps.	kg-m	FL	3/4L	1/2L	FL	3/4L	1/2L	Current Ratio	Torque Ratio	Torque Ratio	kgm ²	kg
0.12	0.16	63	2H063413AT000	1320	0.39	0.09	0.73	0.62	0.48	59.1	59.1	53.0	2.5	1.7	2.0	0.0010	4.5
0.18	0.25	63	2H063433AT000	1340	0.54	0.13	0.72	0.62	0.50	64.7	64.7	59.0	3.0	1.7	2.0	0.0013	5.5
0.25	0.35	71	2H0714A3AT000	1375	0.72	0.18	0.71	0.61	0.45	68.5	68.5	60.0	3.5	1.7	1.9	0.0022	6.8
0.37	0.50	71	2H071433AT000	1400	1.00	0.26	0.68	0.58	0.47	72.7	72.7	70.0	3.5	2.0	2.2	0.0031	8
0.55	0.75	80	2H080433AT000	1420	1.34	0.38	0.74	0.64	0.50	77.1	77.1	72.0	5.0	2.8	3.0	0.0066	10
0.75	1.0	80	2H080453AT000	1410	1.70	0.52	0.77	0.67	0.55	79.6	79.6	76.0	5.0	2.8	3.0	0.0073	11
1.1	1.5	90S	2H09S423AT000	1425	2.41	0.75	0.78	0.69	0.55	81.4	81.4	79.0	5.5	2.3	2.7	0.0097	14
1.5	2.0	90L	2H09L473AT000	1425	3.23	1.03	0.78	0.68	0.56	82.8	82.8	80.5	5.5	2.5	2.8	0.0130	17
2.2	3	100L	2H10L473AT000	1425	4.37	1.50	0.83	0.74	0.60	84.3	84.3	82.5	6.0	2.6	3.0	0.0211	24
3.7	5	112M	2H11M473AT000	1445	7.36	2.49	0.81	0.76	0.64	86.3	86.3	85.0	6.0	2.6	3.0	0.0494	32
5.5	7.5	132S	2H13S4K3AT000	1450	10.4	3.69	0.84	0.81	0.67	87.7	87.7	86.0	6.5	2.2	2.8	0.103	48
7.5	10	132M	2H13M4T3AT000	1450	14.0	5.04	0.84	0.76	0.65	88.7	88.7	87.0	6.5	2.3	2.8	0.125	57
9.3	12.5	160M	2H16M4C3CT000	1465	17.6	6.18	0.82	0.76	0.68	89.4	89.4	87.0	6.5	2.4	2.7	0.187	99
11	15	160M	2H16M4K3CT000	1465	20.5	7.31	0.83	0.78	0.68	89.8	89.8	88.5	6.5	2.4	2.7	0.224	109
15	20	160L	2H16L4T3CT000	1465	27.8	10.0	0.83	0.78	0.68	90.6	90.6	89.5	6.5	2.4	2.7	0.293	132
18.5	25	180M	2H18M473CT000	1465	33.6	12.3	0.84	0.80	0.70	91.2	91.2	90.5	6.0	2.6	2.9	0.467	168
22	30	180L	2H18L483CT000	1465	39.3	14.6	0.85	0.82	0.72	91.6	91.6	91.0	6.5	2.6	2.9	0.532	187
30	40	200L	2H20L45300000	1470	52.6	19.9	0.86	0.82	0.72	92.3	92.0	90.0	7.0	2.6	2.6	0.930	275
37	50	225S	2H22S433CT000	1470	65.3	24.5	0.85	0.82	0.75	92.7	92.7	91.0	6.0	2.3	2.4	1.41	330
45	60	225M	2H22M453CT000	1470	79.1	29.8	0.85	0.82	0.74	93.1	92.8	91.0	6.5	2.4	2.5	1.67	362
55	75	250M	2H25M43300000	1482	96.3	36.1	0.85	0.80	0.72	93.5	93.5	92.0	7.0	2.6	2.8	3.06	520
75	100	280S	2H28S423CT000	1485	129	49.2	0.86	0.83	0.76	94.0	94.0	93.0	6.5	2.4	2.6	6.00	670
90	120	280M	2H28M453CT000	1485	155	59.0	0.86	0.82	0.76	94.2	94.2	93.5	6.5	2.3	2.8	6.87	725
110	150	315S	2H31S413CT000	1488	191	72	0.85	0.82	0.72	94.5	94.5	93.2	6.5	2.5	3.0	9.04	900
125	170	315M	2H31M4A3CT000	1488	216	81.8	0.85	0.80	0.73	94.7	94.4	93.5	6.8	2.25	2.75	10.7	970
132	180	315M	2H31M433CT000	1488	225	86.4	0.86	0.83	0.76	94.7	94.7	94.0	6.5	2.25	2.75	10.7	970
150	200	315L	2H31L4A3CT000	1487	259	98.3	0.85	0.83	0.76	94.9	94.7	94.0	6.8	2.5	3.0	13.3	1165
160	215	315L	2H31L453CT000	1487	273	105	0.86	0.84	0.78	94.9	94.9	94.0	6.5	2.4	3.0	13.3	1165
180	240	315L	2H31L463CT000	1488	307	118	0.86	0.84	0.78	95.0	95.0	94.5	6.5	2.4	3.0	14.9	1230
200	270	315L	2H31L473CT000	1489	336	131	0.87	0.84	0.78	95.1	95.1	94.0	6.5	2.4	3.0	17.0	1320
250	335	355L	2H35L41300000	1488	416	164	0.88	0.85	0.75	95.1	94.9	93.5	6.5	2.2	2.5	23.3	1680
315	422	355L	2H35L43300000	1488	524	206	0.88	0.85	0.75	95.1	94.8	93.5	6.5	2.2	2.5	32.7	1855
355	475	355L	2H35L45300000	1488	590	232	0.88	0.85	0.75	95.1	94.9	93.5	6.5	2.2	2.5	32.2	2186

Note: All performance values are subject to tolerance as per IS/IEC 60034-1

LV MOTORS: IE2 SAFE AREA

Performance Data: IE2 Efficiency Series for Safe Area Application

Applicable standard for testing & efficiency determination : IS15999

Voltage: 415V +/- 10%

Frequency: 50Hz +/- 5%

Combined Variation: +/- 10%

Ambient: 50°C

Duty: S1 (Continuous)

1000 rpm (6 Pole)

Insulation: Class F

Temperature Rise: Class B

Protection: IP55

Rated Output		Frame size	Type Reference	Operating characteristics at rated output					With DOL starting				Rotor GD ²	Net Weight B3 constr.
				Rated Speed	Rated Current	Rated Torque	Power Factor			Starting Current to Rated Current Ratio	Starting Torque to Rated Torque Ratio	Pullout Torque to Rated Torque Ratio		
kW	HP		B3 construction	RPM	Amps.	kg-m	FL	3/4L	1/2L	FL	3/4L	1/2L	kgm ²	kg
0.37	0.5	80	2H080613AT000	910	1.06	0.40	0.72	0.62	0.50	67.6	67.6	63.0	0.0054	8
0.55	0.75	80	2H080633AT000	910	1.45	0.59	0.72	0.63	0.50	73.1	73.1	70.0	0.0078	10
0.75	1.0	90S	2H09S633AT000	920	1.90	0.79	0.72	0.61	0.50	75.9	75.9	72.3	0.0105	14
1.1	1.5	90L	2H09L653AT000	920	2.72	1.16	0.72	0.61	0.50	78.1	78.1	74.0	0.0155	17
1.5	2.0	100L	2H10L633AT000	935	3.63	1.56	0.72	0.62	0.52	79.8	79.8	76.0	0.0241	22
2.2	3.0	112M	2H11M653AT000	955	5.00	2.24	0.75	0.65	0.56	81.8	81.8	79.8	0.0609	32
3.70	5.0	132S	2H13S6G3AT000	960	7.83	3.75	0.78	0.73	0.60	84.3	84.3	83.5	0.109	46
5.50	7.50	132M	2H13M6T3AT000	960	11.6	5.58	0.77	0.71	0.60	86.0	86.0	85.0	0.152	59
7.5	10	160M	2H16M633CT000	965	15.3	7.57	0.78	0.73	0.62	87.2	87.2	86.0	0.217	97
9.3	12.5	160L	2H16L663CT000	965	18.6	9.39	0.79	0.74	0.64	88.0	88.0	86.7	0.289	115
11	15	160L	2H16L673CT000	965	22.1	11.1	0.78	0.73	0.62	88.7	88.7	87.0	0.319	120
15	20	180L	2H18L633CT000	975	28.4	15.0	0.82	0.78	0.68	89.7	89.7	89.0	0.740	183
18.5	25	200L	2H20L633CT000	975	34.7	18.5	0.82	0.77	0.69	90.4	90.4	89.5	1.10	242
22	30	200L	2H20L653CT000	975	41.1	22.0	0.82	0.77	0.69	90.9	90.9	89.5	1.30	260
30	40	225M	2H22M643CT000	980	52.3	29.8	0.87	0.84	0.76	91.7	91.7	90.0	2.41	355
37	50	250M	2H25M633CT000	980	63.4	36.8	0.88	0.85	0.78	92.2	92.2	91.8	3.25	500
45	60	280S	2H28S613CT000	983	80.4	44.6	0.84	0.81	0.73	92.7	92.7	92.6	4.68	580
55	75	280M	2H28M633CT000	983	96.7	54.5	0.85	0.82	0.75	93.1	93.1	92.8	6.18	640
75	100	315S	2H31S61300000	988	133	73.9	0.84	0.82	0.75	93.7	93.7	92.5	10.7	830
90	120	315M	2H31M63300000	989	159	88.6	0.84	0.80	0.74	94.0	94.0	92.9	12.4	912
110	150	315M	2H31M65300000	989	193	108	0.84	0.81	0.74	94.3	94.3	93.3	15.5	1010
125	170	315L	2H31L6A300000	990	222	123	0.83	0.80	0.72	94.4	94.2	93.0	18.0	1175
132	180	315L	2H31L67300000	990	231	130	0.84	0.81	0.74	94.6	94.6	93.8	18.0	1175
150	200	315L	2H31L68300000	990	269	148	0.82	0.79	0.70	94.7	94.3	92.8	21.5	1231
160	215	315L	2H31L69300000	990	280	157	0.84	0.81	0.71	94.8	94.5	93.0	21.5	1231
180	240	355L	2H35L6A300000	990	322	177	0.82	0.77	0.65	94.9	94.6	93.3	28.7	1670
200	270	355L	2H35L61300000	990	349	197	0.84	0.80	0.70	95.0	94.7	93.5	28.7	1670
250	335	355L	2H35L63300000	990	436	246	0.84	0.80	0.70	95.0	94.7	93.4	35.5	1780

Note: All performance values are subject to tolerance as per IS/IEC 60034-1

LV MOTORS: IE2 SAFE AREA

Performance Data: IE2 Efficiency Series for Safe Area Application

Applicable standard for testing & efficiency determination : IS15999

Voltage: 415V +/- 10%

Frequency: 50Hz +/- 5%

Combined Variation: +/- 10%

Ambient: 50°C

Duty: S1 (Continuous)

750 rpm (8 Pole)

Insulation: Class F


Temperature Rise: Class B

Protection: IP55

Rated Output		Frame size	Type Reference	Operating characteristics at rated output					With DOL starting				Rotor GD ²	Net Weight B3 constr.
				Rated Speed	Rated Current	Rated Torque	Power Factor			Starting Current to Rated Current Ratio	Starting Torque to Rated Torque Ratio	Pullout Torque to Rated Torque Ratio		
kW	HP		B3 construction	RPM	Amps.	kg-m	FL	3/4L	1/2L	FL	3/4L	1/2L	kgm ²	kg
0.12	0.16	71	2H071833AT000	640	0.76	0.18	0.55	0.50	0.40	0.55	0.50	0.40	39.8	7
0.37	0.5	90S	2H09S813AT000	680	1.30	0.53	0.71	0.58	0.46	0.71	0.58	0.46	56.1	12
0.55	0.75	90L	2H09L853AT000	680	1.82	0.79	0.68	0.60	0.46	0.68	0.60	0.46	61.7	14
0.75	1.0	100L	2H10L813AT000	685	2.25	1.07	0.70	0.61	0.50	0.70	0.61	0.50	66.2	18
1.1	1.5	100L	2H10L833AT000	680	3.09	1.58	0.70	0.61	0.50	0.70	0.61	0.50	70.8	20
1.5	2.0	112M	2H11M813AT000	695	4.00	2.10	0.70	0.61	0.49	0.70	0.61	0.49	74.1	25
2.2	3.0	132S	2H13S8B3AT000	705	5.33	3.04	0.74	0.66	0.55	0.74	0.66	0.55	77.6	41
3.7	5.0	160M	2H16M813CT000	715	8.55	5.04	0.74	0.68	0.55	0.74	0.68	0.55	81.4	87
5.5	7.5	160M	2H16M833CT000	715	12.2	7.49	0.75	0.68	0.55	0.75	0.68	0.55	83.8	101
7.5	10	160L	2H16L863CT000	715	16.3	10.2	0.75	0.70	0.58	0.75	0.70	0.58	85.3	119
9.3	12.5	180M	2H18M833CT000	725	19.5	12.5	0.77	0.74	0.64	0.77	0.74	0.64	86.3	170
11	15	180L	2H18L873CT000	725	22.9	14.8	0.77	0.74	0.64	0.77	0.74	0.64	86.9	187
15	20	200L	2H20L843CT000	725	28.9	20.2	0.82	0.77	0.65	0.82	0.77	0.65	88.0	264
18.5	25	225S	2H22S823CT000	725	35.4	24.9	0.82	0.80	0.72	0.82	0.80	0.72	88.6	324
22	30	225M	2H22M833CT000	725	41.9	29.6	0.82	0.80	0.72	0.82	0.80	0.72	89.1	351
30	40	250M	2H25M813CT000	730	56.7	40.0	0.82	0.80	0.72	0.82	0.80	0.72	89.8	498
37	50	280S	2H28S823CT000	730	73.1	49.4	0.78	0.74	0.65	0.78	0.74	0.65	90.3	641
45	60	280M	2H28M853CT000	738	90.8	59.4	0.76	0.72	0.60	0.76	0.72	0.60	90.7	690

Note: All performance values are subject to tolerance as per IS/IEC 60034-1

DIMENSIONAL DRAWING: IE2 EFFICIENCY SERIES FOR SAFE AREA APPLICATION FOOT MOUNTED (B3) MOTORS

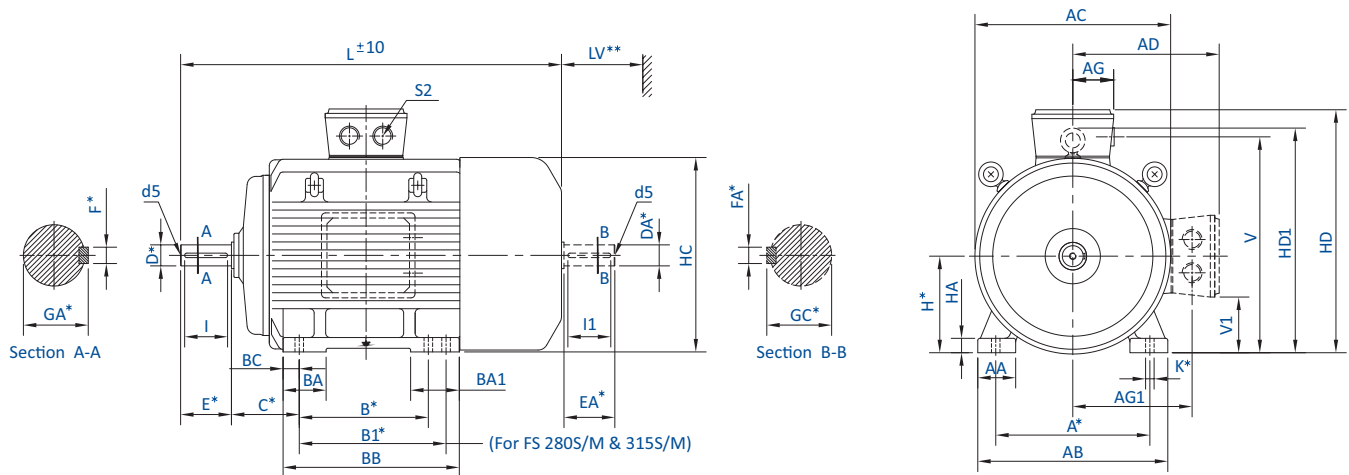[illegible]

Notes:


- * This is a mandatory dimension for all standard motors
- **Minimum distance for efficient cooling of motor to be maintained by user

1. All dimensions are in mm unless otherwise specified
2. Tolerances on mandatory dimensions are as per IS: 1231
3. For non standard motors, dimensions may change. Please contact our nearest sales office for details

Notes:

1. Eyebolt is not provided for frame sizes from 63 to 90 frame
2. Shaft extension at NDE identical to standard shaft extension at DE is not possible in 4, 6 & 8 pole in frames 315L & 355L
3. TB Position : To be read as : when viewed from DE side / when viewed parallel to the shaft / cable entry
 - (a) **63, 160, 180, 225 frame; 200 frame: 2, 6 & 8 pole:** Top / Center of body / RHS when viewed from DE side
 - (b) **71 to 132 Frame & 250 to 355 Frame:** Top / Towards Drive End / RHS when viewed from DE side
 - (c) **200 Frame: 4 pole:** RHS / Center of Body / NDE Side

DIMENSIONAL DRAWING: IE2 EFFICIENCY SERIES FOR SAFE AREA APPLICATION FLANGE MOUNTED (B5) MOTORS

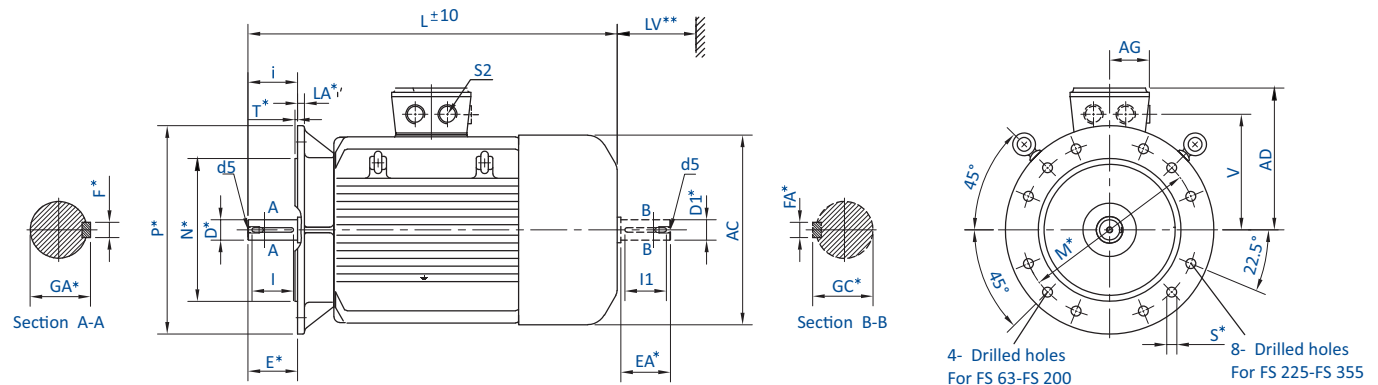


		FIXING					GENERAL						TERMINAL BOX			SHAFT					
IEC Fr. Size	Pole	P*	N*	M*	i	S*	T*	LA*	AD	L	LV**	AC	V	AG	S2 BSC	D* DA*	E* EA*	F* FA*	GA* GC*	I l1	d5
63	4	140	95	115	23	10	3	9	116	225	30	124	86	40	1x3/4"	11	23	4	12.5	18	M4
71	2,4&8	160	110	130	30	10	3.5	9	124	262	30	140	95	40	1x3/4"	14	30	5	16	25	M5
80	2,4&6	200	130	165	40	12	3.5	10	134	267	30	157	105	40	1x3/4"	19	40	6	21.5	35	M6
90S	2,4,6&8	200	130	165	50	12	3.5	10	140	302	35	174	109	52	2x3/4"	24	50	8	27	45	M8
90L	2,4,6&8									327											
100L	2,4,6&8	250	180	215	60	15	4	11	157	366	40	195	125	56	2x1"	28	60	8	31	55	M10
112M	4,6&8	250	180	215	60	15	4	11	170	388	45	220	134	56	2x1"	28	60	8	31	55	M10
132S	2(7.5kW)	300	230	265	80	15	4	12	196	518	50	260	159	63	2x1"	38	80	10	41	70	M12
	2&4									475											
	6&8									459											
132M	4	350	250	300	110	19	5	13	223	513	60	316	186	63	2x1"	42	110	12	45	105	M16
	6									497											
160M	2(15kW)	350	250	300	110	19	5	13	223	635	60	316	186	63	2x1"	42	110	12	45	105	M16
	2									605											
	4,6&8									585											
160L	2&4	350	250	300	110	19	5	13	223	679	70	354	216	97	2x1 1/2"	48	110	14	51.5	100	M16
	6&8									629											
180M	2,4&8	350	250	300	110	19	5	13	271	679	70	354	216	97	2x1 1/2"	48	110	14	51.5	100	M16
180L	4,6&8									717											
200L	2	400	300	350	110	19	5	15	319	795	80	394	249	155	2x2"	55	110	16	59	100	M20
	4,6&8									772											
225S	4&8	450	350	400	140	19	5	16	343	827	90	445	275	155	2x2"	60	140	18	64	130	M20
225M	2				110					837						55	110	16	59	100	
	4,6&8	550	450	500	140	19	5	18	415	855	100	489	328	243	2x2"	60	140	18	64	130	M20
	2				140					914						65	140	18	69	130	
280S/M	2	550	450	500	140	19	5	18	445	1010	115	544	358	243	2x2"	65	140	18	69	130	M20
	4,6&8				75					140						20	79.5	130			
315S/M	2	660	550	600	140	24	6	22	519	1175	130	604	413	278	2x2"	65	140	18	69	130	M20
	4&6				170					1167						80	170	22	85	160	
315L	2	660	550	600	140	24	6	22	519	1342	145	695	495	403	2x2 1/2"	65	140	18	69	130	M24
	4&6				170					1332						90	170	25	95	160	
355L	2	800	680	740	140	24	6	25	584	1461	145	695	495	403	2x3"	75	140	20	79.5	130	M20
	4(355kW)				210					1575						100	210	28	106	200	
	4&6	800	680	740	210	24	6	25	584	1531	145	695	495	403	2x3"	100	210	28	106	200	M24

Notes: * This is a mandatory dimension for all standard motors
 **Minimum distance for efficient cooling of motor to be maintained by user
 1. All dimensions are in mm unless otherwise specified
 2. Tolerances on mandatory dimensions are as per IS: 2223
 3. For non standard motors, dimensions may change. Please contact our nearest sales office for details

Notes: 1. Eyebolt is not provided for frame sizes from 63 to 90 frame
 2. Shaft extension at NDE identical to standard shaft extension at DE is not possible in 4, 6 & 8 pole in frames 315L & 355L
 3. TB Position: To be read as: when viewed parallel to the shaft / cable entry
(a) 63, 160, 180, 225 frame; 200 frame: 2, 6 & 8 pole: Center of body / RHS when viewed from DE side & TB is at Top
(b) 71 to 132 Frame & 250 to 355 Frame: Towards Drive End / RHS when viewed from DE side & TB is at Top
(c) 200 Frame: 4 pole: Center of Body / NDE Side

DIMENSIONAL DRAWING: IE2 EFFICIENCY SERIES FOR SAFE AREA APPLICATION FACE MOUNTED (B14) MOTORS

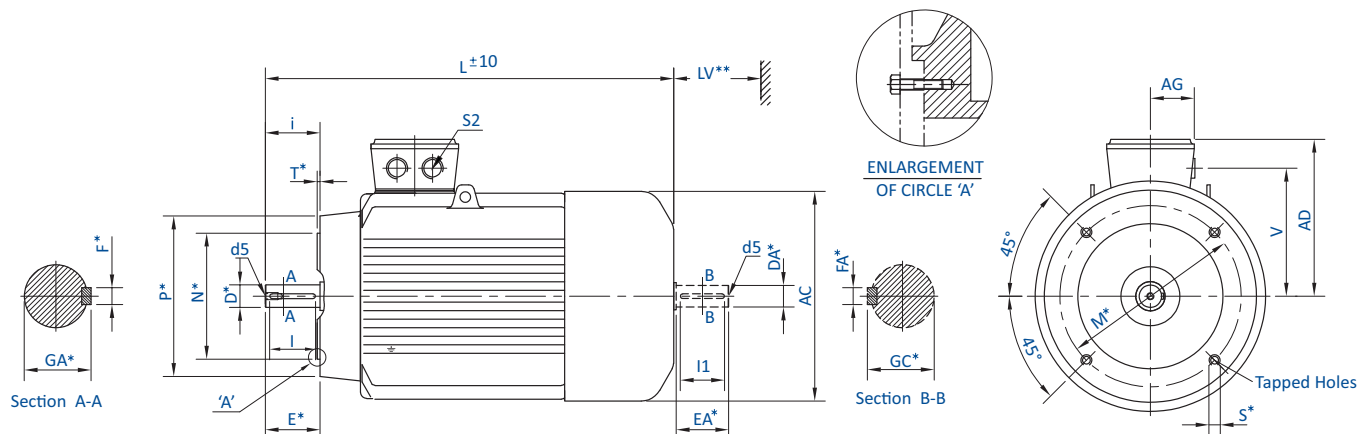


		FIXING					GENERAL					TERMINAL BOX			SHAFT					
IEC Fr. Size	Pole	P*	N*	M*	i	S*	T*	AD	L	LV**	AC	V	AG	S2 BSC	D* DA*	E* EA*	F* FA*	GA* GC*	I I1	d5
63	4	90	60	75	23	M5X10	2.5	116	206	30	124	86	40	1x3/4"	11	23	4	12.5	18	M4
71	2,4&8	105	70	85	30	M6X10	2.5	124	235	30	140	95	40	1x3/4"	14	30	5	16	25	M5
80	2,4&6	120	80	100	40	M6X13	3	134	267	30	157	105	40	1x3/4"	19	40	6	21.5	35	M6
90S	2,4,6&8	140	95	115	50	M8X12	3	140	302	35	174	109	52	2x3/4"	24	50	8	27	45	M8
90L	2,4,6&8								327											
100L	2,4,6&8	160	110	130	60	M8X12	3.5	157	366	40	195	125	56	2x1"	28	60	8	31	55	M10
112M	4,6&8	160	110	130	60	M8X12	3.5	170	388	45	220	134	56	2x1"	28	60	8	31	55	M10

Notes:

- * This is a mandatory dimension for all standard motors
- **Minimum distance for efficient cooling of motor to be maintained by user
- 1. All dimensions are in mm unless otherwise specified
- 2. Tolerances on mandatory dimensions are as per IS: 2223
- 3. For non standard motors, dimensions may change. Please contact our nearest sales office for details

Notes:

1. Eyebolt is not provided for frame sizes from 63 to 90 frame
2. For the dimensional drawing of 132 frame, B14 mounting kindly contact our nearest sales office
3. TB Position: To be read as: when viewed parallel to the shaft / cable entry
 - (a) **63 Frame:** Center of body / RHS when viewed from DE side & TB is at Top
 - (b) **71 to 112 Frame:** Towards Drive End / RHS when viewed from DE side & TB is at Top

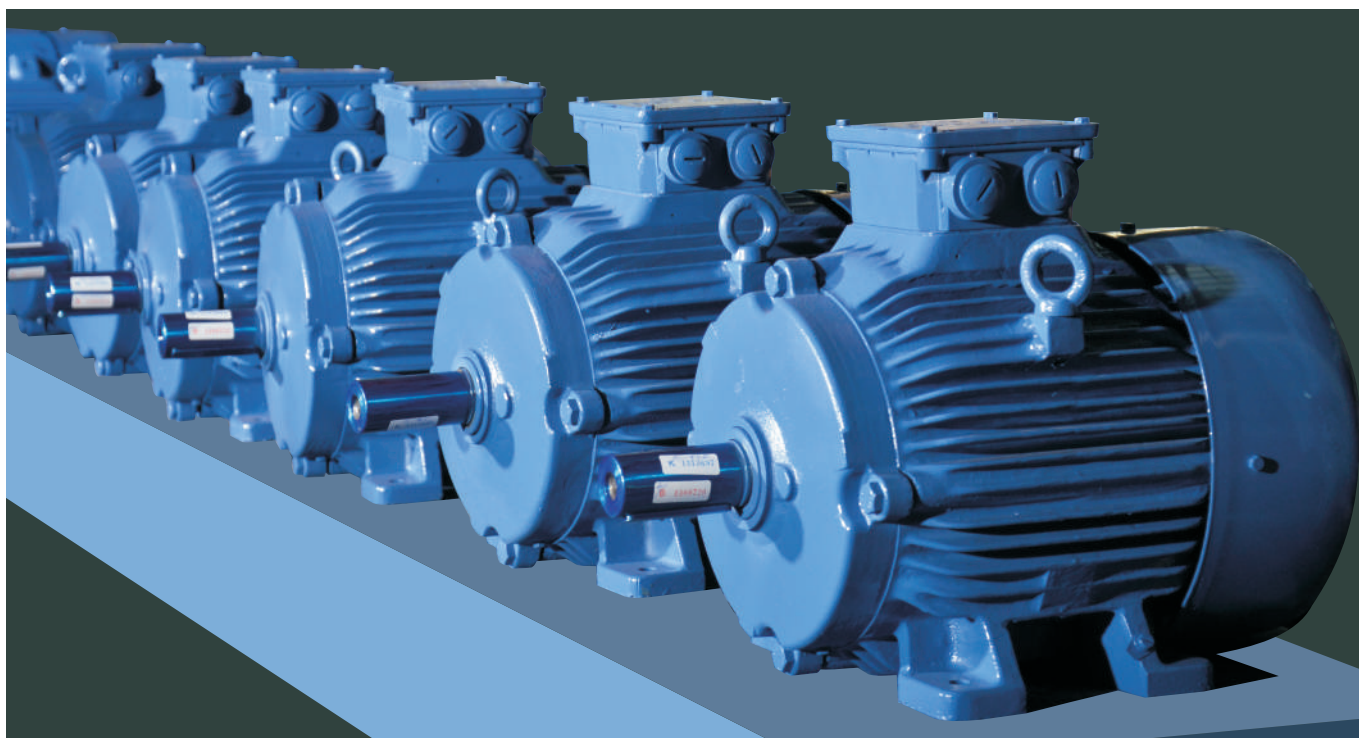

LV MOTORS PRODUCT RANGE

Motors Conform to relevant Indian Standards (IS) & IEC 60034 series
Voltage: 415V +/- 10%, Frequency: 50 Hz +/- 5%, Combined Variation: +/- 10%

Insulation: Class 'F' with temperature rise limited to Class 'B', Rotation: Bi-directional
Cooling: IC411, Degree of Protection: IP55, Altitude: upto 1000m above MSL

Motor Type	Frame	Power (kW)	Polarity		Standard Technical Specifications	Optional Features		Applications
IE2 Motors	71 to 355	0.37 to 355	2, 4, 6		- Ambient: 50° C - Ambient for DCCA: 40° C - Mounting: B3, B5, B35, V1 - Inverter Grade Winding: For IE3 and DCCA - Duty: S1 - RTD & BTD: For DCCA motors	- Non Standard Voltage: upto 690V - Shaft Material: EN24 - Enclosure: IP56 / 65 / 66 - Forced Cooling: 132 to 450 Frame - Space Heater: 90 Frame onwards - Roller Bearing: 160 Frame onwards - RTD & BTD: 250 Frame onwards - Insulation: Class H - Thermistor: 80 to 355L	- Insulated Bearing: 160 Frame onwards - High Temperature Grease: Suitable up to 200° C - Higher Polarity on request - SS Hardware - Non std shaft diameter / extension (subject to confirmation) - Non Standard Paint - Provision for Encoder Mounting - Low Vibration as per IS or IEC	Most common applications comprising of: Pump, Fan, Compressor, Packing Machinery, Coiler/De-coiler, Agro Equipment, Food Processing Equipment, Paper Machinery, Agitator, Dairy Equipment, Machine Tool, Air Conditioning, Material Handling, Plastic Machinery, Textile Machinery, Cooling Tower, Crusher, Material Handling
IE3 Motors	80 to 355	0.55 to 355	2, 4, 6					
Large LT Motors (DCCA)	355 to 450	250 to 1250	2, 4, 6, 8					
IE4 MOTORS	112 to 225	1.5 to 45	4		- Ambient: 50° C - Mounting: B3, B5, B35, V1 - Inverter Duty Winding - Duty: S1 - VPI: With Class H solvent less Resin	- Shaft Material: EN24 - Enclosure: IP56 / 65 / 66 - Roller Bearing: 160 Frame onwards - Insulation: Class H - Space Heater: 90 frame onwards - Thermistor: 80 to 225 Frame	- Non std shaft diameter / extension (subject to confirmation) - Non Standard Paint - Provision for Encoder Mounting - Low Vibration as per IS or IEC	Fans, HVAC, Pumps,Textiles,hydraulic press
Standard Flame Proof Motors	80 to 315	0.37 to 200	2, 4, 6, 8		- Ambient: 45° C - Mounting: B3, B5, B35, V1 - Inverter Grade Winding: For IE3 Motors - Duty: S1	- Non Standard Voltage: 550V - Shaft Material: EN24 - Enclosure: IP56 / 65 / 66 - Space Heater: 90 Frame onwards - Roller Bearing: 160 Frame onwards - Insulation: Class H 8 pole motor on request - Thermistor: 80 to 315 L	- Insulated Bearing: 160 Frame onwards - Intermittent Duty S3, S4: 80 to 132 Frame in 4 pole only - Non std shaft diameter / extension - Motors for Inverter Duty - Test facility for combined Testing with VFD - Non Standard Paint - Low Vibration as per IS or IEC	Most common applications comprising of: Pump, Fan, Compressor, Material Handling, Agitator, LPG Bottling Plant, Pharma Machinery, Chemical Plant Machinery, Machinery for mines
IE2 Flame Proof Motors	80 to 315	0.37 to 200	2, 4, 6, 8					
IE3 Flame Proof Motors	80 to 315	0.75 to 180	2, 4, 6					
IE2 Non - Sparking Motors	71 to 355	0.37 to 355	2, 4, 6		- Ambient: 50° C - Mounting: B3, B5, B35, V1 (B14 upto 132 Frame) - Duty: S1	- Shaft Material: EN24 - Enclosure: IP56 / 65 / 66 - Roller Bearing: 160 Frame onwards - Insulation: Class H	- Insulated Bearing: 160 Frame onwards - Higher Polarity on request - Non std shaft diameter / extension - Motors for Inverter Duty - Test facility for combined testing with VFD - Non Standard Paint - Low Vibration as per IS or IEC	Pump, Fan, Compressor, Material Handling, Agitator, Pharma Machinery
Crane & Hoist Duty Motors	71 to 355	0.37 to 400	4, 6, 8		- Ambient: 45° C - Mounting: B3, B5, B35, V1 (B14 upto 132 Frame) - Duty: S2, S3, S4, S5 - Offered in DOL & Converter Fed Supply	- Non Standard Voltage: 380 to 460V - Shaft Material: EN24 - Enclosure: IP56 / 65 / 66 - Space Heater: 90 Frame onwards - Roller Bearing: 160 Frame onwards - BTD: 250 Frame & above - Insulation: Class H - Thermistor: 80 to 355 L	- Insulated Bearing: 160 Frame onwards - Non std shaft diameter & extension - Motors for Inverter Duty - Non Standard Paint - Low Vibration as per IS or IEC	Crane, Hoist, Lift, Material Handling, Car Stacker, Door Opening
Brake Motors (With Integral DC Brake)	71 to 132	0.37 to 9.3	2, 4, 6, 8		- Ambient: 50° C - Duty: S1, S2, S3, S4, S5 - Mounting: B3, B5, B35 - Integral DC Brake	- Non Standard Voltage: upto 460V - Manual Release Arrangement: For 90 to 132 Frame - Motors for Inverter Duty	- Non std shaft diameter & extension - Double Shaft Extension for brake arrangement - Non Standard Paint	Crane, Hoist, Material Handling, Textile, Pharma to name a few
Brake Motors (With External Mounted Brake)	71 to 200	0.37 to 22	2, 4, 6		- Ambient: 50° C - Duty: S1, S2, S3, S4, S5 - Mounting: B3, B5, B35 - External Mounted DC Brake/Arrangement	- Non Standard Voltage: upto 460V - Manual Release Arrangement - Motors for Inverter Duty	- Double Shaft Extension for brake arrangement - Non Standard Paint - Higher Braking Torque	Crane, Hoist, Material Handling, Textile, Pharma to name a few
Slip Ring Motors	100 to 160	1.1 to 10	4, 6		- Ambient: 45° C - Mounting: B3, B35 - Duty: S3, S4, S5	Non std shaft diameter & extension	Non Standard Paint	Crane, Hoist, Lift, Material Handling
Textile Motors	100 to 160	1.1 to 15	4, 6, 8		- Ambient: 50° C - Mounting: B3, B5, B35 - Duty: S1	- Non Standard Voltage: upto 500V - Insulation: Class H	- Motors for Inverter Duty - Non Standard Paint - Low Vibration as per IS	Ginning, Textile Machinery
Cane Unloader Motors	160 to 225	11 to 30	6		- Ambient: 45° C - Start/Stop per Hour: upto 900 - Mounting: B3, B5, B35 - Forced Cooling - Thermostat - Duty: S5, 50% CDF - Shaft Material: EN24	- Insulation: Class H - Thermistor	- Insulated Bearing: 160 Frame onwards - Non Standard Paint	Cane Loading-Unloading Machine

CERTIFICATIONS




Super Premium Energy Efficient
SynchroVERT™ IE4 Motor:
Winner of CII's Most Innovative
Energy Saving Product 2016

New Product



Ultra Premium Energy Efficient
IE5 Motor:
Winner of CII's Most Innovative
Energy Saving Product 2018

Upcoming Product

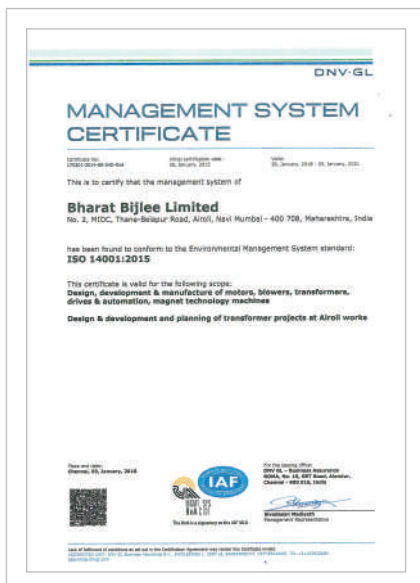

ISO 14001:2015



OHSAS 18001:2007



ISO 9001:2015

MOTOR, DRIVE AND AUTOMATION SOLUTIONS



Visualisation & HMI



Controls



Drives



Motors

Bharat Bijlee's Industrial Systems product portfolio caters to a spectrum of applications and spans the machine automation pyramid.


ALL INDIA SERVICE NETWORK

● Regional Offices

🔥 Works

● Authorised Service Centre: Motors

✂ Service Centre: Servo Motors

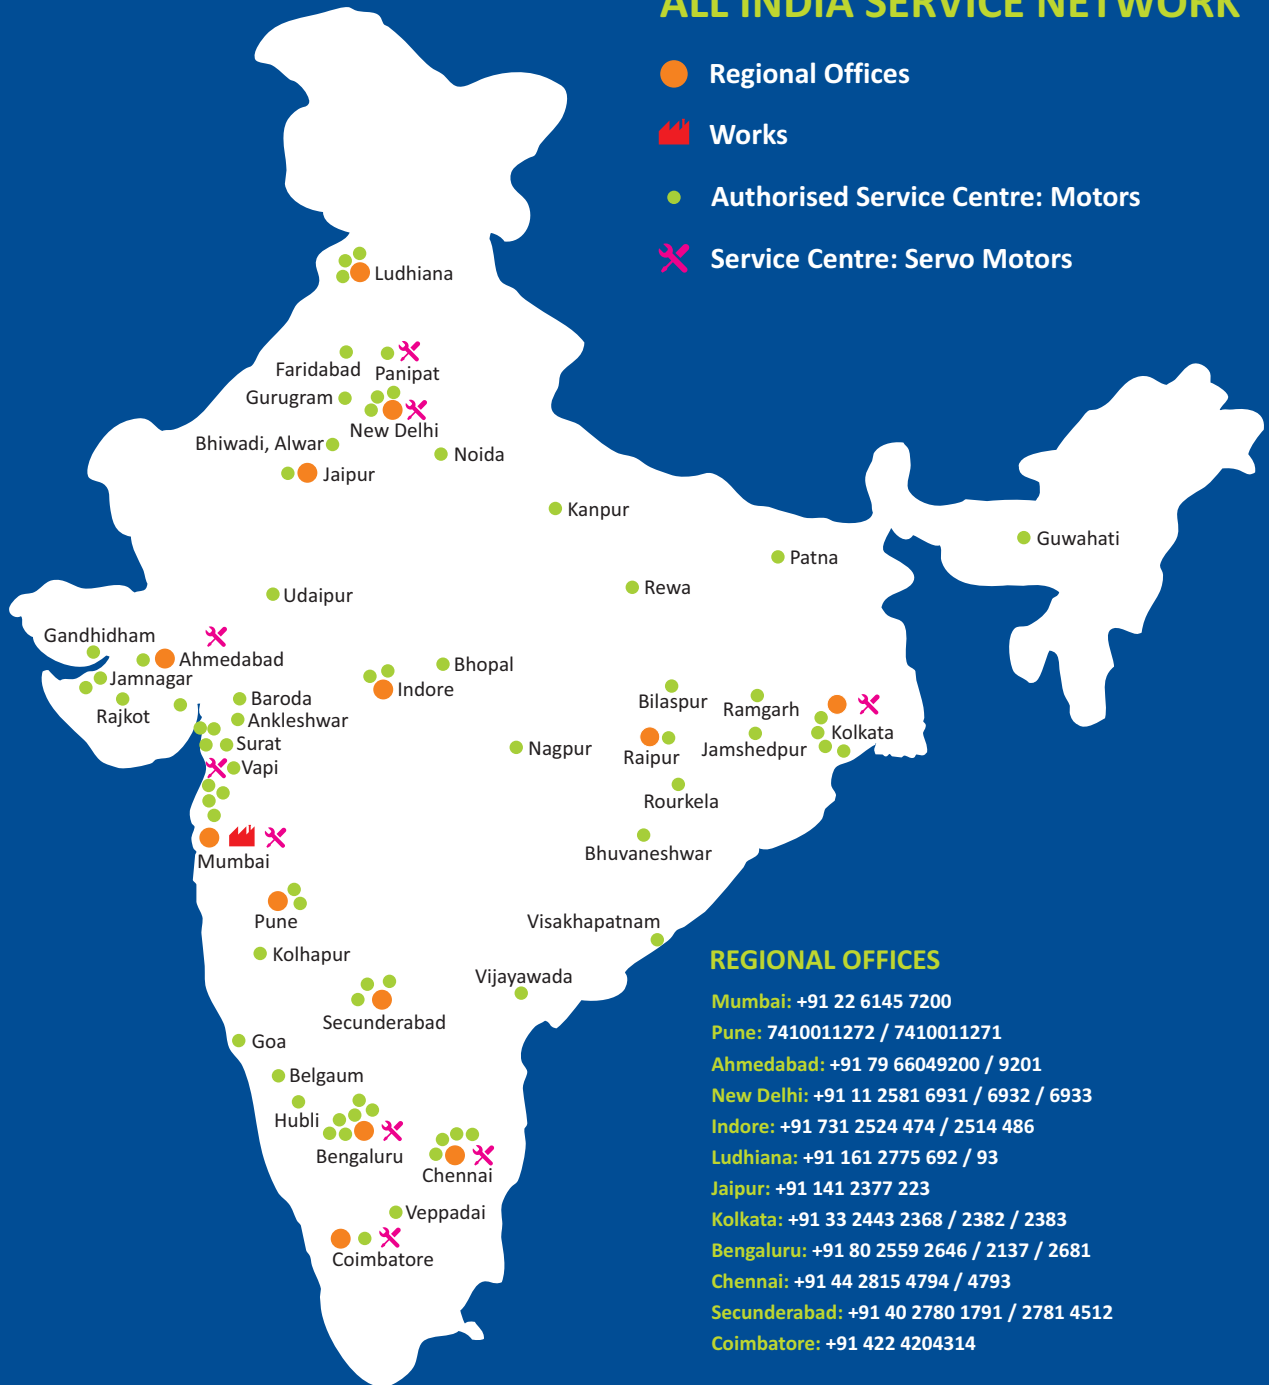

REGIONAL OFFICES

Mumbai: +91 22 6145 7200

Pune: 7410011272 / 7410011271

Ahmedabad: +91 79 66049200 / 9201

New Delhi: +91 11 2581 6931 / 6932 / 6933

Indore: +91 731 2524 474 / 2514 486

Ludhiana: +91 161 2775 692 / 93

Jaipur: +91 141 2377 223

Kolkata: +91 33 2443 2368 / 2382 / 2383

Bengaluru: +91 80 2559 2646 / 2137 / 2681

Chennai: +91 44 2815 4794 / 4793

Secunderabad: +91 40 2780 1791 / 2781 4512

Coimbatore: +91 422 4204314

For any enquiries please write to motorlvsales@bharatbijlee.com

BB ServiceLINE™
Customer Service Helpdesk for Industrial Systems

+91 22 - 2763 7290 | serviceline@bharatbijlee.com

Bharat Bijlee

REGISTERED OFFICE

Electric Mansion, 6th Floor,
Appasaheb Marathe Marg,
Prabhadevi, Mumbai 400 025
T: +91 22 2430 6237 / 6375
E: info@bharatbijlee.com
CIN: L31300MH1946PLC005017

WORKS

No. 2, MIDC Thane-Belapur Road, Airoli,
Navi Mumbai 400 708
T: +91 22 2763 7200 / +91 22 2760 0401

www.bharatbijlee.com