

ENGINEERING
TOMORROW




Selection guide | VLT® AutomationDrive FC 360

VLT® AutomationDrive FC 360



www.danfoss.com/FC360

VLT®
THE REAL DRIVE



1968 was the year when
Danfoss presented the first
mass produced frequency
converter in the world –
and named it VLT®

PERFORMANCE, RELIABILITY AND SPEED

**Increase quality and efficiency with
energy efficient, user friendly control of
motors from 0.37 to 75 kW.**

Built on the success of the tried and tested VLT® platform that Danfoss developed and launched in the 1960's, the VLT® AutomationDrive FC 360 shares the same technical heritage as the popular and versatile VLT® AutomationDrive FC 300 series. Developed to meet a general purpose operation profile the drive lacks the expandability of its larger sibling, but still delivers powerful performance out of the box.

Due to the fact that all Danfoss frequency converters follow the same basic design and operating principle, existing owners and users of VLT® drives will instantly feel at home when operating the VLT AutomationDrive FC 360.


The VLT® AutomationDrive FC 360 is a dedicated industry drive , designed for OEMs, that provides precise and efficient motor control in a wide range of industrial applications.

Built-in features help owners save

- Space in installations
- Time in setup
- Effort in daily maintenance.

The result is a powerful and versatile solution that increases process efficiency and quality in a cost-efficient package





Built-in features provide high performance and reduce the need for external components. This reduces complexity and makes the ordering process easier.

REDUCED HARMONICS
A built-in DC choke reduces harmonics to 40-48% THDi and significantly extends the lifetime of the DC capacitor.

Designed for challenging environments

Using advanced coating and quality internal electronics protection, the FC 360 has the rugged characteristics demanded by the textile, plastics, rubber, food, beverage and building materials industries.

Maximize productivity

IP20 standard protection and an easy to use control panel saves valuable time in commissioning and maintenance, and enables owners to maximize uptime and save energy..

Compact design for easy installation

The compact, lightweight design enables owners to optimize panels space by mounting several drives side-by-side mounting with zero clearance.

Save time on setup

Easy parameter setup makes the path to energy savings both short and simple, and can be carried out with an enhanced numeric LCP or graphical control panel that supports English and Chinese. Targeted 'Application Selections' make it easy for users to set up and commission typical applications.



HIGH RELIABILITY

Coated Printed Circuit Boards

High level 3C3 Printed Circuit Board (PCB) coating as standard provides high reliability in harsh environments to prevent failures and downtime. The lifetime of the drive is also increased as a result of the IEC 60721-3-3 conformal coating.

55°C Working Temperature

VLT® AutomationDrive FC 360 is designed to operate at 45-50°C ambient temperature at full load (depending on model) and 55°C with derating. This means there is no need to install extra cooling equipment or oversize the drive, resulting in cost savings.

Efficient heat management

A unique cooling concept ensures that there is no forced air flow over the electronics. This reduces the risk of downtime, while strengthening stability in daily operation.

By preventing dust and particles from accumulating on the small internal components and legs, the risk of short circuits is significantly reduced, especially in humid environments.



COATED PCB

The VLT® AutomationDrive FC 360 is delivered with a 3C3 class coated PCB as standard to strengthen reliability.



EASY CLEANING

An easy to remove fan makes it easy to keep dust from affecting the drive's ventilation.



DISPLAY

Customer can select enhanced numerical display or graphical control panel that supports English and Chinese (requires adaptor).



ENCLOSURE

The VLT® AutomationDrive FC 360 is available with an IP 20 enclosure.



Optimized for industrial applications

- Extruders
- Escalators
- Winders
- Material Handling
- Palletizer
- Conveyor
- Draw Bench
- Textile Machinery
- Hoist
- Air Compressor
- Printing & Dyeing
- Glass Production Line
- Centrifuge separators
- Pumps
- Fans



**HIGH PERFORMANCE
CONTROLLER**
VLT® AutomationDrive
FC 360 has an advanced
controller with high speed
response making high-end,
complicated applications
easy.

**450 kg force at 0.6 Hz. The high
torque performance of a 0.75
kW VLT® AutomationDrive FC
360 fully meets the demands
for tensile testing at Samuya
Technocrates in India.**

SPEED

PM motor control

The FC 360 can provide highly efficient permanent magnet (PM) motor control in open loop under VVC+ mode in motors up to 22kW. Using Automatic Motor Adaptation (AMA) the drive adapts to the specific characteristics of the permanent magnet motor.

Smart Logic Control

Smart Logic is a simple and clever way to keep the drive, motor and application working together. The smart logic controller monitors a specific event, and when it occurs, it triggers a predefined action which is monitored for 20 steps, before returning to step 1.

The Smart Logic Controller can monitor any parameter that can be defined as "true" or "false", providing users with significant freedom to tailor the control strategy to their specific needs. This includes digital commands and logic expressions, where sensor outputs can influence operation using parameters such as temperature, pressure, torque, flow, time, load, frequency, voltage, and others, combined with the operators ">", "<", "=", "and" and "or" as logical statements.

Expand with control and feedback modules

Fieldbus communication in VLT® AutomationDrive FC 360 is integrated in the control card. In addition, the drive can be expanded with options for additional control and encoder feedback.

With the VLT® Encoder Input MCB 102 and VLT® Resolver Input MCB 103 the VLT® AutomationDrive FC 360 can receive encoder feedback from either a motor or a process.

Time saving setup VLT® Motion Control Tool MCT 10

The FC 360 can be configured and monitored with Danfoss own VLT® Motion Control Tool MCT 10 software. This provides plant managers with a comprehensive overview over the system at any point in time and a high level of flexibility in configuration and monitoring.

MCT 10 is a windows based engineering tool with a clearly structured interface that provides an instant overview of all the drives in a system of any size. The software runs under Windows and enables data exchange over a traditional RS 485 interface or fieldbus (PROFIBUS).

Parameter configuration is possible both online and offline, and the software can be configured to link to the system's electrical diagrams or operating manuals. This helps to reduce the risk of incorrect configuration while offering fast access to troubleshooting.



EASY SETUP VIA PC

Connect the VLT® AutomationDrive FC 360 directly to a PC for fast and easy transfer of settings.



USE WITH VLT® OneGearDrive®

The VLT® AutomationDrive FC 360 is designed to work perfectly with permanent magnet motors, such as the VLT® OneGearDrive®, which is widely used in Danfoss VLT® FlexConcept®.

FEATURES DESIGNED TO MEET INDUSTRIAL NEEDS

The VLT® AutomationDrive FC 360 is designed to provide maximum uptime and reliability in a wide range of environments.

Built-in Brake Chopper

A built-in brake chopper up to 22kW saves money and panel space.

Pulse Input as Speed Reference

VLT® AutomationDrive FC 360 offers the capability to convert pulse input as a speed reference, avoiding the need to purchase an analog signal module for PLC.

Center Winder

FC 360 supports center winder functionality, eliminating the need for a special module in the programmable logic control (PLC).

Built-in PID Controller

The built in PID controller calculates an 'error' value as the difference between a measured process variable and a desired setpoint.

Built-in RFI Filter

Built-in filters not only save space, but also eliminate additional costs for fitting, wiring, and material. The most important advantage is the perfect EMC conformance and cabling of integrated filters.

Positioning

FC 360 supports positioning functionality and actualizes the functionality through I/O or fieldbus, eliminating the need for a special module in the programmable logic control (PLC).

Torque Closed Loop Control

Torque close loop control actualizes the functionality through encoder feedback; both 32/33 pulse inputs and MCB102 inputs are available.


PM Motor Control

FC 360 supports synchronous motor control, including Surface Placed Magnets (SPM) and Interior Placed Magnets (IPM).

Synchronizing*

FC360 supports speed and position synchronizing functionality, eliminating the need for extra options or special module in the programmable logic control (PLC).

** Function is scheduled for a near future firmware release.*

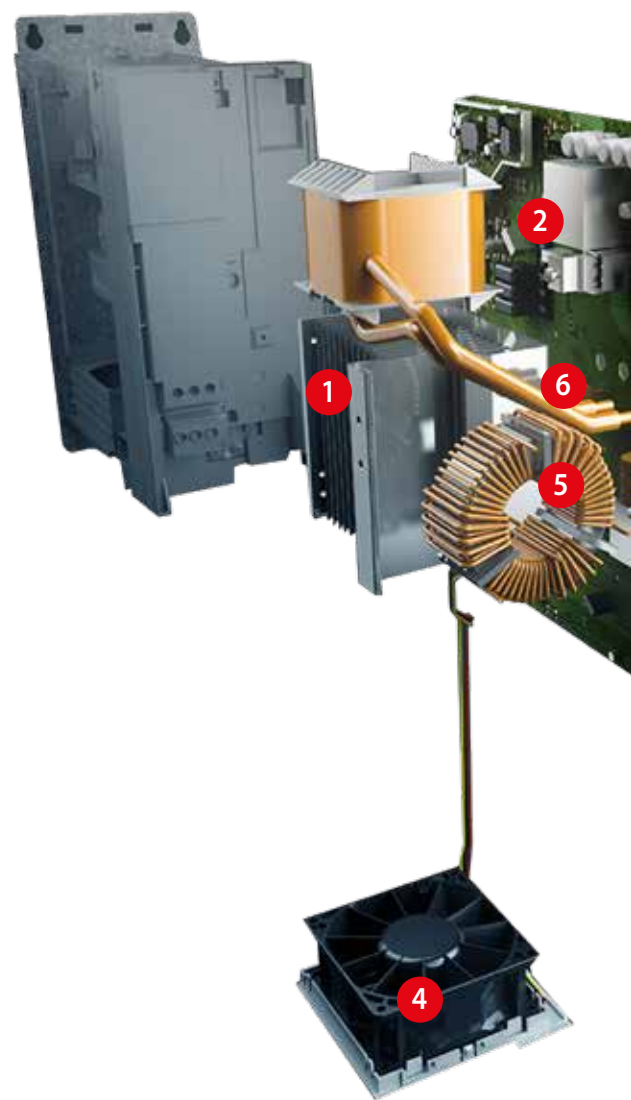


See the interactive presentation and video at www.danfoss.com/fc360

DESIGNED FOR A WIDE
RANGE OF POWER
SUPPLY CONDITIONS
VLT® AutomationDrive
FC 360 can operate at
-15% of supply voltage



- 1** Designed for use in ambient temperatures up 45-50°C without derating. Max. ambient temperature 55°C
- 2** No forced air over PCB for whole power range (0.37 to 75kW)
- 3** Class C3C coated components for increased reliability in harsh environments (IEC 60721-3-3)
- 4** Removable fan
- 5** EMC compliant. Meets class C3 with limit A2 (EN 55011) as standard
- 6** Built-in brake chopper up to 22 kW
- 7** Fieldbus embedded in control card (FC Protocol, Modbus RTU, Options: PROFIBUS and PROFINET)
- 8** I/O number and functions
 - 7DI / 2AI / 2AO / 2 DO
 - Pulse input as speed reference
 - Pulse feedback and 24V encoder feedback
 - 24V (100 mA)
 - 12V
- 9** Display options
 - Graphic LCP
 - Enhanced numeric LCP
 - Blind cover
- *** Full automatic motor adaptation (AMA) optimizes compatibility between frequency converter and motor in VVC+ mode
- *** Built-in Smart Logic Controller
- *** RFI Switch

** Not visible on picture*

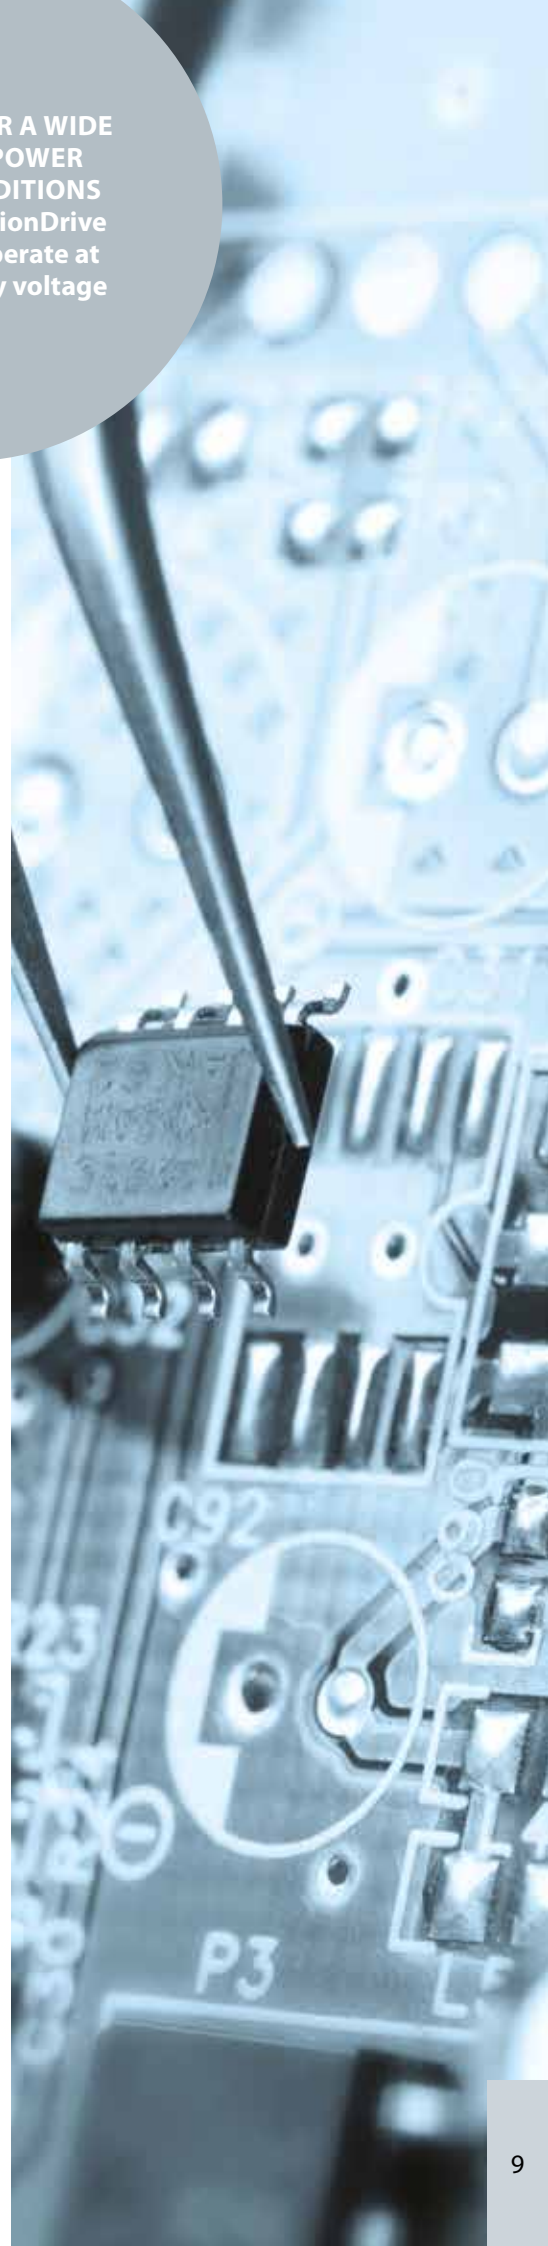

SPECIFICATIONS

(Basic unit without extensions)

Main supply (L1, L2, L3)	
Supply voltage	380–480 V -15%/+10%
Supply frequency	50/60 Hz ±5%
Displacement power factor (cos φ)	> 0.98
Switching on input supply L1, L2, L3	0.37-7.5 kW maximum 2 times/min. 11-75 kW maximum 1 time/min.
Harmonic disturbance	Meets EN 61000-3-12

Output data (U, V, W)	
Output voltage	0 – 100% of supply voltage
Output frequency	0-500 Hz 0-200 Hz under VVC+ Mode
Switching on output	Unlimited
Ramp times	0.05-3600 sec

Note: 160% current can be provided for 1 minute.
Higher overload rating is achieved by oversizing the drive.

Digital inputs	
Programmable digital inputs	7
Changeable to digital output	2 (Terminal 27,29)
Logic	PNP or NPN
Voltage level	0 – 24 V DC
Maximum voltage on input	28 V DC
Input resistance, Ri	Approx. 4 kΩ
Scan interval	1 ms

* 2 can be used as digital outputs

Analog inputs	
Analogue inputs	2
Modes	Voltage or current
Voltage level	0 to +10 V (scaleable)
Current level	0/4 to 20 mA (scaleable)
Accuracy of analog inputs	Max. error 0.5% of full scale

Pulse/encoder inputs	
Programmable pulse/encoder inputs	2/1
Voltage level	0 – 24 V DC (PNP positive logic)
Pulse input accuracy (0.1 – 1 kHz)	Max. error: 0.1% of full scale
Encoder input accuracy	4Hz-32kHz

* Utilize some of the digital inputs

Digital outputs	
Programmable digital/pulse outputs	2
Voltage level at digital/frequency output	0 – 24 V DC
Max. output current (sink or source)	40 mA
Maximum output frequency at frequency output	4Hz to 32 kHz
Accuracy on frequency output	Max. error: 0.1% of full scale

* Utilize 2 digital inputs

Analogue output	
Programmable analogue outputs	2
Current range at analogue output	0/4 – 20 mA
Max. load to common at analogue output (clamp 30)	500 Ω
Accuracy on analogue output	Max. error: 0.8 % of full scale

Control card	
RS485 interface	Up to 115 kBaud
Max. load (10 V)	15 mA
Max. load (24 V)	100 mA

Relay output	
Programmable relay outputs	2
Max. terminal load (AC) on 1-3 (break), 1-2 (make), 4-6 (break) power card	250V AC, 3 A
Max. terminal load (AC) on 4-5 (make) power card	250V AC, 3 A
Min. terminal load on 1-3 (break), 1-2 (make), 4-6 (break), 4-5 (make) power card	250V AC, 0.2 A


Surroundings/external	
Enclosure	IP20
Vibration test	1.0 g
Max. relative humidity	5-95% (IEC 60721-3-3; Class 3K3 (non-condensing) during operation)
Ambient temperature	max. 55°C with derating
Galvanic isolation of all	I/O supplies according to PELV
Aggressive environment	Class 3C3

Fieldbus communication	
Standard built-in	FC Protocol Modbus RTU
Fieldbus built-in control card variants	PROFIBUS or PROFINET



CONNECTION EXAMPLES

The numbers represent the terminals on the drive

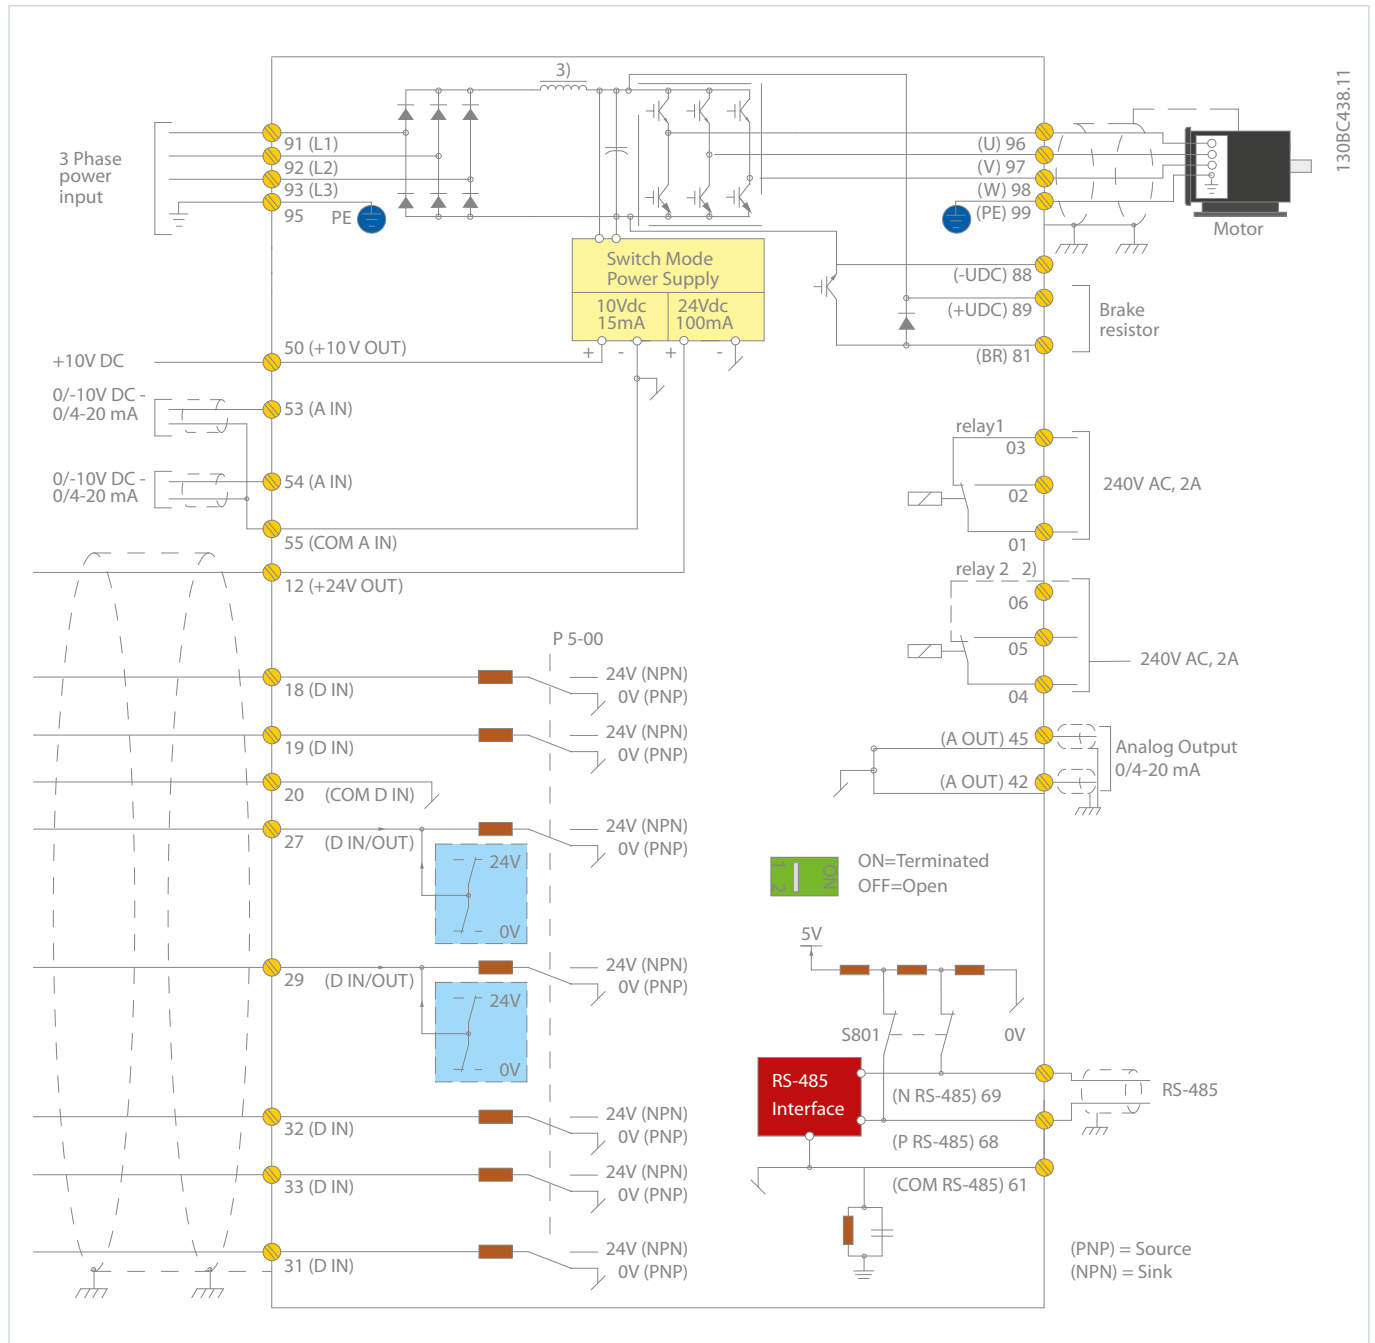

¹ Built-in braking chopper available from 0.37 - 22 kW

² Relay 2 is 2 pole for J1-J3 and 3 pole for J4-J7. Relay 2 of J4-J7 with terminal 4,5,6, same NO/NC logic as Relay 1.

³ Dual DC choke in 30-75 kW

⁴ Switch S801 (bus terminal) can be used to enable termination on the RS-485 port (terminals 68 and 69).

⁵ Terminal 81 not available from 30 - 75kW

The diagram shows the port terminals of the VLT® AutomationDrive FC 360.

The numbers indicated refer to the terminal numbers of the drives. Users can set the mode of the analogue inputs 53 and 54 by setting software parameters.

The FC 360 features a RS485 interface as standard. The RS485 terminations are integrated in the drive (S801).


PROFIBUS DP or PROFINET can be specified by configuring different control cassette when ordering.

To switch from NPN to PNP logic for the digital signals, use parameter 5-00.

POWER, CURRENTS, ENCLOSURES AND ORDERING TYPE CODE

T4 380 – 480 V (High and normal overload)				
FC 360	kW	Amp.		IP 20 /Chassis
		380-439V	440-480V	
HK37	0.37	1.2	1.1	J1
HK55	0.55	1.7	1.6	
HK75	0.75	2.2	2.1	
H1K1	1.1	3.0	2.8	
H1K5	1.5	3.7	3.4	
H2K2	2.2	5.3	4.8	J2
H3K0	3.0	7.2	6.3	
H4K0	4.0	9.0	8.2	
H5K5	5.5	12	11	J3
H7K5	7.5	15.5	14	J4
H11K/Q11K	11	23	21	
H15K/Q15K	15	31	27	J5
H18K/Q18K	18	37	34	
H22K/Q22K	22	42.5	40	J6
H30K/Q30K	30	61	52	
H37K/Q37K	37	73	65	J7
H45K/Q45K	45	90	80	
H55K/Q55K	55	106	96	
H75K/Q75K	75	147	124	

Dimensions [mm]

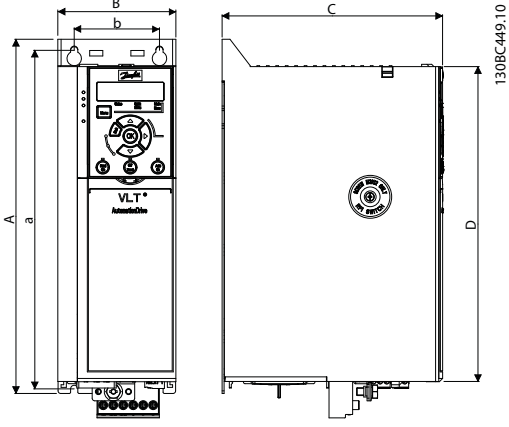Frame size 380-480 V	J1	J2	J3	J4	J5	J6	J7
Power size [kW]	0.37-2.2	3.0-5.5	7.5	11-15	18.5-22	30-45	55-75
Dimensions [mm]							
Height A	210	272.5	272.5	317.5	410	515	550
Width B	75	90	115	133	150	233	308
Depth C (with option B)	168 (173)	168 (173)	168 (173)	245 (250)	245 (250)	241	323
Mounting holes							
a	198	260	260	297.5	390	495	521
b	60	70	90	105	120	200	270
Mounting screw	M4	M5	M5	M6	M6	M8	M8

[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]	[9]	[10]	[11]	[12]	[13]	[14]				
FC-360	-		-		-		-		-	X	-	SXX X	-	X	-		

[1] Application	
360	VLT® AutomationDrive FC 360
[2] Power Size	
HK37	See ratings data on page 11 for power ratings
HK55	
HK75	
H1K1	
H1K5	
H2K2	
H3K0	
H4K0	
H5K5	
H7K5	
H11K/ Q11K	
H15K/ Q15K	
H18K/ Q18K	
H22K/ Q22K	
H30K/ Q30K	
H37K/ Q37K	
H45K/ Q45K	
H55K/ Q55K	
H75K/ Q75K	

[3] AC Line Voltage	
T4	3 x 380/480 V AC (High overload) 3 x 380/480 V AC (Normal overload)
[4] Enclosure	
For cabinet mounting:	
E20	IP 20/Chassis
[5] RFI Filter (EN 55011)	
H2	RFI-Filter class A2 (C3)
[6] Braking	
X	No brake IGBT
B	Built-in brake IGBT
* 0.37-22kW built-in; 30-75kW not	
[7] Display (Local Control Panel)	
X	No LCP, blind cover
* Following accessories available: NLCP, GLCP and blind cover	

[8] Conformal Coating (IEC 60721-3-3)	
C	Conformal coating on all PCBs
[9] Mains Input	
D	Load sharing terminals
[10] Cable	
X	Standard Cable Entry
[13] Fieldbus embedded in control cassette	
AX	No fieldbus option
A0	PROFIBUS
AL	PROFINET
[14] B Option (Application)	
BX	No application option
* VLT® Encoder Input MCB102 and VLT® Resolver Input MCB 103 available as accessories	

380 – 480 VAC

Enclosure		IP 20	J1						J2			J3
		HO	HK37	HK55	HK75	H1K1	H1K5	H2K2	H3K0	H4K0	H5K5	H7K5
Typical Shaft Output		[kW]	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5
Typical Shaft Output at 460 V		[HP]	0.5	0.75	1	1.5	2	3	4	5.5	7.5	10
Output Current (3 x 380 – 440 V)	Continuous	[A]	1.2	1.7	2.2	3	3.7	5.3	7.2	9	12	15.5
Output Current (3 x 441 – 480 V)	Continuous	[A]	1.1	1.6	2.1	3	3.4	4.8	6.3	8.2	11	14
Intermittent (60 s overload)		[A]	1.9	2.7	3.5	4.8	5.9	8.5	11.5	14.4	19.2	24.8
Output Power (400 V AC)	Continuous	[kVA]	0.8	1.2	1.5	2.1	2.6	3.7	5.0	6.2	8.3	10.7
Output Power (460 V AC)	Continuous	[kVA]	0.9	1.3	1.8	2.5	2.8	4	5.2	6.8	9.2	11.6
Max. cable size (Mains, motor, brake and load sharing)		[mm ²] ([AWG])	4 mm ²									
Max. Input Current (3 x 380 – 440 V)	Continuous	[A]	1.2	1.6	2.1	2.6	3.5	4.7	6.3	8.3	11.2	15.1
Max. Input Current (3 x 441 – 480 V)	Continuous	[A]	1	1.2	1.8	2	2.9	3.9	4.3	6.8	9.4	12.6
Intermittent (60 s overload)		[A]	1.9	2.6	3.4	4.2	5.6	7.5	10.1	13.3	17.9	24.2
Max. pre-fuses		[A]	10						25			32
Environment												
Estimated power loss at rated max. load		[W]	20.8	25.1	30	40	52.9	73.9	94.8	115.5	157.5	192.8
Weight												
IP 20		[kg]	2.3	2.3	2.3	2.3	2.3	2.5	3.6	3.6	3.6	4.1
Efficiency			0.96	0.97				0.98				

Enclosure		IP 20	J4		J5		J6			J7		
		HO (NO)	H11K (Q11K)	H15K (Q15K)	H18K (Q18K)	H22K (Q22K)	H30K (Q30K)	H37K (Q37K)	H45K (Q45K)	H55K (Q55K)	H75K (Q75K)	
Typical Shaft Output		[kW]	11	15	18	22	30	37	45	55	75	
Typical Shaft Output at 460 V		[HP]	15	20	25	30	40	50	60	75	100	
Output Current (3 x 380 – 440 V)	Continuous	[A]	23	31	37	42.5	61	73	90	106	147	
Output Current (3 x 441 – 480 V)	Continuous	[A]	21	27	34	40	52	65	80	96	124	
Intermittent (60 s overload)		[A]	34.5 (25.3)	46.5 (34.1)	55.5 (40.7)	63.8 (46.8)	91.5 (67.1)	109.5 (80.3)	135 (99)	159 (116.6)	220.5 (161.7)	
Output Power (400 V AC)	Continuous	[kVA]	15.9	21.5	25.6	29.5	42.3	50.6	62.4	73.4	101.8	
Output Power (460 V AC)	Continuous	[kVA]	17.5	22.5	28.3	33.3	43.2	54	66.5	79.8	103.1	
Max. cable size (Mains, motor, brake)		[mm²] ([AWG])	16 mm²				50 mm²				85 mm²	
Max. Input Current (3 x 380 – 440 V)	Continuous	[A]	22.1	29.9	35.2	41.5	57	70.3	84.2	102.9	140.3	
Max. Input Current (3 x 441 – 480 V)	Continuous	[A]	18.4	24.7	29.3	34.6	49.2	60.6	72.2	88.6	120.9	
Intermittent (60 s overload)		[A]	33.2 (24.3)	44.9 (32.9)	52.8 (38.7)	62.3 (45.7)	85.5 (62.7)	105.45 (77.3)	126.3 (92.6)	154.35 (113.2)	210.45 (154.3)	
Max. pre-fuses		[A]	50		80		160			250		
Environment												
Estimated power loss at rated max. load		[W]	289.5	393.3	402.8	467.5	630	848	1175	1300	1507	
Weight												
IP 20		[kg]	9.4	9.5	12.3	12.5	22.4	22.5	22.6	37.3	38.7	
Efficiency								0.98				

OPTIONS AND ACCESSORIES

PROFIBUS DP-V1

Operating the frequency converter via a fieldbus lets you reduce the cost of your system, communicate faster and more efficiently, and benefit from an easier user interface.

- PROFIBUS DP-V1 gives you wide compatibility, a high level of availability, support for all major PLC vendors, and compatibility with future versions
- Fast, efficient communication, transparent installation, advanced diagnosis and parameterisation and auto-configuration of process data via GSD-file
- A-cyclic parameterisation using PROFIBUS DP-V1, PROFIdrive or Danfoss FC profile state machines, PROFIBUS DP-V1, Master Class 1 and 2

PROFINET

PROFINET uniquely combines the highest performance with the highest degree of openness. PROFINET gives the user access to the power of Ethernet and minimizes user effort to migrate to PROFINET, and securing the investment in PLC program.

- Built-in high performance switch enabling line and ring topology, and eliminating the need for external switches
- Built-in web server for remote diagnosis and reading basic drive parameters
- Support of DP-V1 Diagnostic allows easy, fast and standardized handling of warning and fault information into the PLC, improving bandwidth in the system

PROFINET encompasses a suite of messages and services for a variety of manufacturing automation applications, including control, configuration and information.

VLT® Encoder Input MCB 102

A universal option for connection of encoder feedback from either a motor or a process. Feedback for asynchronous motors.

Encoder module supports:

- Incremental encoders
- SinCos encoders as Hyperface®
- Power supply for encoders
- RS422 interface
- Connection to all standard 5 V incremental encoders

Ordering number:
132B0282

VLT® Resolver Input MCB 103

Supports resolver feedback for asynchronous motors.

- Primary Voltage:
2 – 8 Vrms
- Primary Frequency:
2.0 kHz – 15 kHz
- Primary current max:
50 mA rms
- Secondary input voltage:
4 Vrms

Ordering number:
132B0283

VLT® Brake Resistors MCE 101

Energy generated during braking is absorbed by the resistors, protecting electrical components from heating up. Danfoss brake resistors are optimized for the FC-series. General versions for horizontal and vertical applications are also available.

- Enclosure protection as IP20 and up to IP65
- Built-in thermo switch
- Versions for vertical and horizontal mounting
- UL-recognized – only types for vertical mounting

VLT® Control Panel LCP 21

The numerical control panel features an excellent user interface to the drive.

- Status messages
- Quick menu for easy commissioning
- Parameter setting and adjusting
- Hand-operated start/stop function or Automatic mode select
- Reset function

Ordering number:
132B0254

Graphical LCP Adapter for FC 360

The converter between FC 360 and the graphical control panel of VLT® AutomationDrive FC 300 series.

- Supports Chinese and English display (requires firmware 1.11 or newer)

Ordering number:
132B0281

VLT® Control Panel LCP 102 functions for FC 360

- English and Chinese display
- Status messages
- Quick menu for easy commissioning
- Parameter setting and explanation of parameter function
- Adjusting of parameters
- Full parameter backup and copy function
- Alarm logging
- Hand-operated start/stop, or Automatic mode selection
- Reset function



Graphical LCP
Adapter for FC 360



VLT® Control Panel LCP 21



VLT® Brake Resistors MCE 101



VLT® Control Panel LCP 102

Other accessories

Blind Cover, FC 360
Ordering number: 132B0262

Remote Mounting Kit for LCP
Ordering number: 132B0102

Decoupling plate mounting kit
- J1
Ordering number: 132B0258

Decoupling plate mounting kit
- J2, J3
Ordering number: 132B0259

Decoupling plate mounting kit
- J4, J5
Ordering number: 132B0260

Decoupling plate mounting kit
- J6
Ordering number: 132B0284

Decoupling plate mounting kit
- J7
Ordering number: 132B0285

Terminal Cover for MCB - J1
Ordering number: 132B0263

Terminal Cover for MCB - J2
Ordering number: 132B0265

Terminal Cover for MCB - J3
Ordering number: 132B0266

Terminal Cover for MCB - J4
Ordering number: 132B0267

Terminal Cover for MCB - J5
Ordering number: 132B0268

The vision behind VLT®

Danfoss is a market leader in the development and manufacture of frequency converters – serving new customers daily.

Environmental responsibility

Danfoss VLT® products – considering people and the environment

All production sites for VLT® frequency converters certified to ISO 14001 and ISO 9001.

Danfoss' activities take employees, jobs and the environment into consideration. Production processes produce minimum noise, emissions and other environmental impacts. In addition, Danfoss seeks to protect the environment when disposing of waste and end-of-life products.

UN Global Compact

Danfoss has confirmed its commitment to social responsibility by signing the UN Global Compact. Our subsidiaries are aware of their responsibility with respect to local conditions and practices.

Energy savings through VLT®

The energy saved in the annual production of VLT® frequency converters is as much as that generated by a large power station each year. Improved process control optimises product quality and reduces waste and wear on the production lines.



Dedicated to drives

Danfoss VLT Drives is a global leader in the area of drive engineering and manufacture. In 1968 Danfoss introduced the world's first mass-produced frequency converters for three-phase motors, and since then has specialised in drive solutions. Today, VLT® stands for reliable technology, innovation and expertise for drive solutions within many different branches of industry.

Innovative and intelligent frequency converters

Danfoss VLT Drives, headquartered in Graasten, Denmark, employs 2500 staff for the development, production, consulting, sales and maintenance of Danfoss drive solutions in over 100 countries.

The modular frequency converters are manufactured according to customer requirements and supplied fully assembled. This ensures that every VLT® is a state-of-the-art device when delivered.

Trust the world experts

To ensure the consistent high standard of quality of our products, Danfoss VLT Drives controls and monitors every important product element. The group has its own research and software development department as well as modern production facilities for hardware, power modules, printed circuit boards and accessories.

VLT® frequency converters are used in diverse applications worldwide. The experts of Danfoss VLT Drives support customers with extensive specialised knowledge relating to specific applications. Comprehensive advice and a fast service ensure an optimal solution with high reliability and availability.

A project is only complete when our customers are fully satisfied with the drive solution.

